
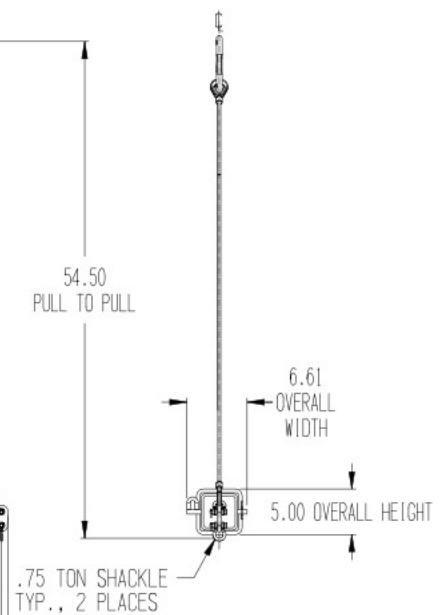


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemloc, Inc.  
Dimensions are subject to manufacturing tolerance and change.

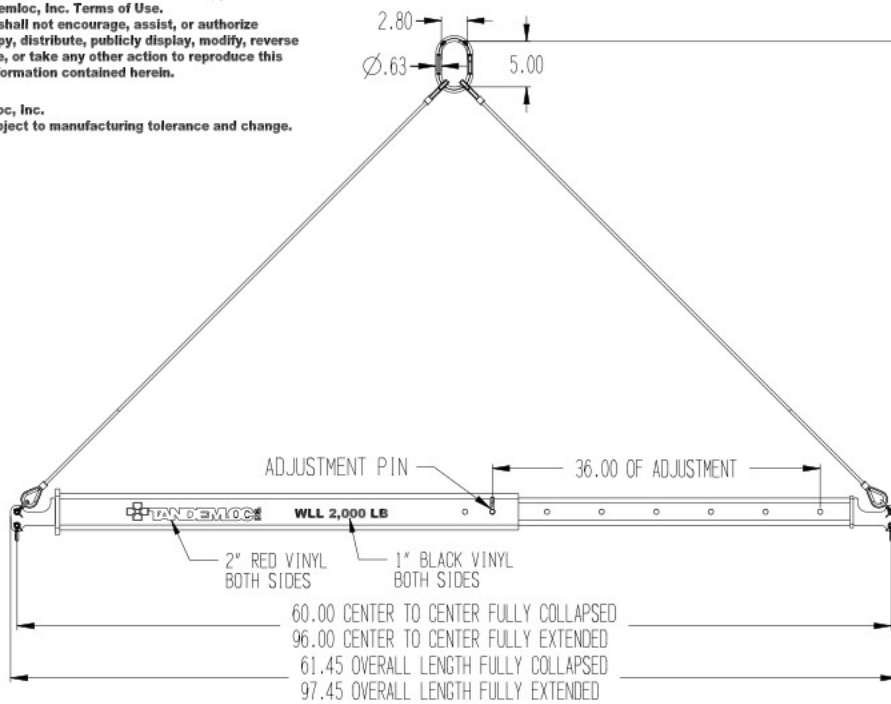

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

- NOTES:
- PART NO.: AT14A002-096-PA, 60"-96" TELESCOPIC SPREADER  
AT14A002-096SPA, 60"-96" TELESCOPIC SPREADER WITH TOP SLING
  - WLL: 2,000 LB. @ 45° MINIMUM
  - PROOF TESTED TO 125% (2,500 LB.) AND CERTIFIED
  - STANDARD SPECIFICATION # EAD21000A APPLIES
  - FINISH: SANDBLAST AND PRIME AND PAINT YELLOW
  - CALCULATED WEIGHT: 136 LB. SPREADER WITH SLING: 145 LB.
  - DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

\*\* DO NOT SIGN IF CHANGES ARE REQUIRED \*\*

CUSTOMER APPROVAL: \_\_\_\_\_

DATE: \_\_\_\_\_

<small>1/16" DIMENSIONS UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES &amp; TOLERANCES ARE:          .XX ±.01          .XXX ±.01          .XXX ±.01</small>	<small>1" DIMENSIONS UNLESS OTHERWISE NOTED. MAX. DEPTH TO .15"          3 TO 4" ±.01, 4.01" TO 7" ±.02          7.01" TO 10.5" ±.02          OVER 10.5" ±.02</small>	
<small>THIS DOCUMENT CONTAINS DATA WHICH IS THE PROPERTY OF TANDEMLOC, INC. REPRODUCTION OR DISTRIBUTION WITHOUT THE WRITTEN AUTHORIZATION OF TANDEMLOC, INC. IS EXPRESSLY PROHIBITED.</small>	<small>APPROVALS</small> DESIGN: DJH DATE: 01-10-19	TITLE: AT14A002-096-PA 60"-96" TELESCOPIC SPREADER
<small>SCALE</small>	<small>REV</small> 0 <small>DATE CODE</small> 65059	<small>INC. NO.</small> SAT14A002-096-PA <small>REV.</small> - <small>SHEET</small> 1 OF 1