
MAINTENANCE LADDER, PERFORATED - LAD-MM-11-P-YL APPROX WEIGHT: 228.53 lbs. *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** *** ANY ADDITIONS DELETIONS OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

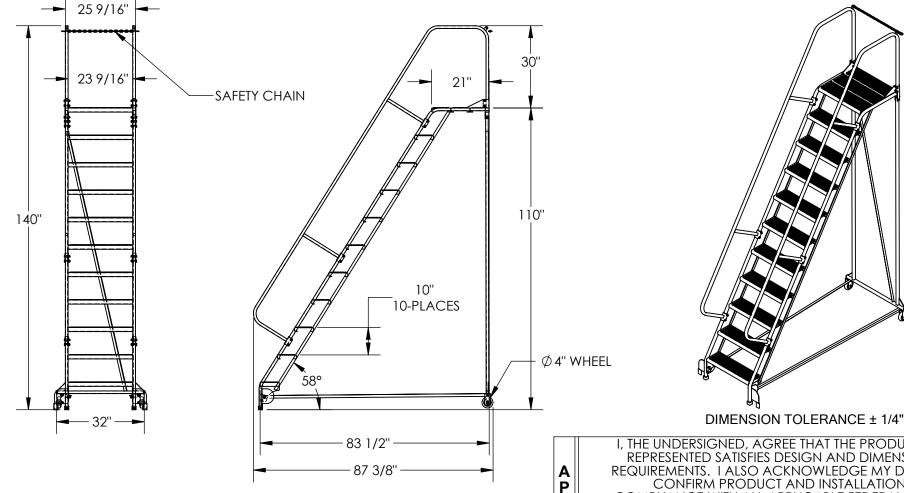

STANDARD FEATURES

MODEL NUMBER IS LAD-MM-11-P-YL NONE

OVERALL WIDTH IS 32"

USABLE WIDTH IS 23 9/16" **OVERALL LENGTH IS 87 3/8"**

USABLE LENGTH IS 83 1/2"

OVERALL HEIGHT IS 140"

PLATFORM HEIGHT IS 110"

TOUGH BAKED IN POWDER COATED YELLOW FINISH

STEP TYPE: PERFORATED STEPS

CLIMB ANGLE: 58° STEP DIM. 24" X 7"

MAX CAPACITY IS 350 LBS

SPECIAL FEATURES

NOTE

-SOME ASSEMBLY REQUIRED

-TOOL TRAY SOLD SEPARATELY

| | | J | | | |
|--|--|---|--|--|--|
| FOR INTERNAL USE ONL PROJECT SIGN OFF | | | | | |
| SALES | | Ī | | | |
| ENG. | | ľ | | | |
| FAB. | | | | | |
| DOW/ED | | (| | | |

Ρ

R

0

V

Α

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed: Date:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

| 1 | DISTRIBUTOR'S NAME: | P.O.# X | | | | | |
|-----|---------------------|-----------|-------------|----------------|--|--|--|
| | VESTIL MANUFAC | W.O.# X | | | | | |
| - 1 | DRAWN BY: JWW | DATE: 5/1 | 8/2020 | SALES: X | | | |
| | reference: X | | SCALE: 1:35 | FILE NAME: | | | |
| 1 | QUOTED LEAD TIME: X | QUOTE # | | 44-007-306-001 | | | |