
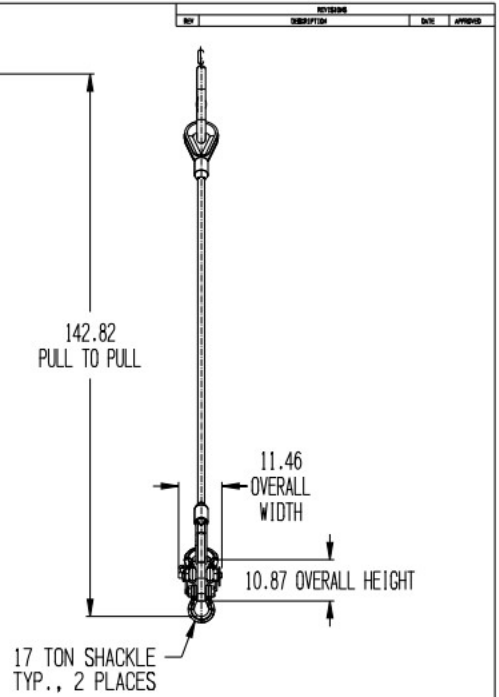


This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use. You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publicly display, modify, reverse engineer, decompile, or take any other action to reproduce this document or the information contained herein.

©2019 by Tandemloc, Inc.
Dimensions are subject to manufacturing tolerance and change.

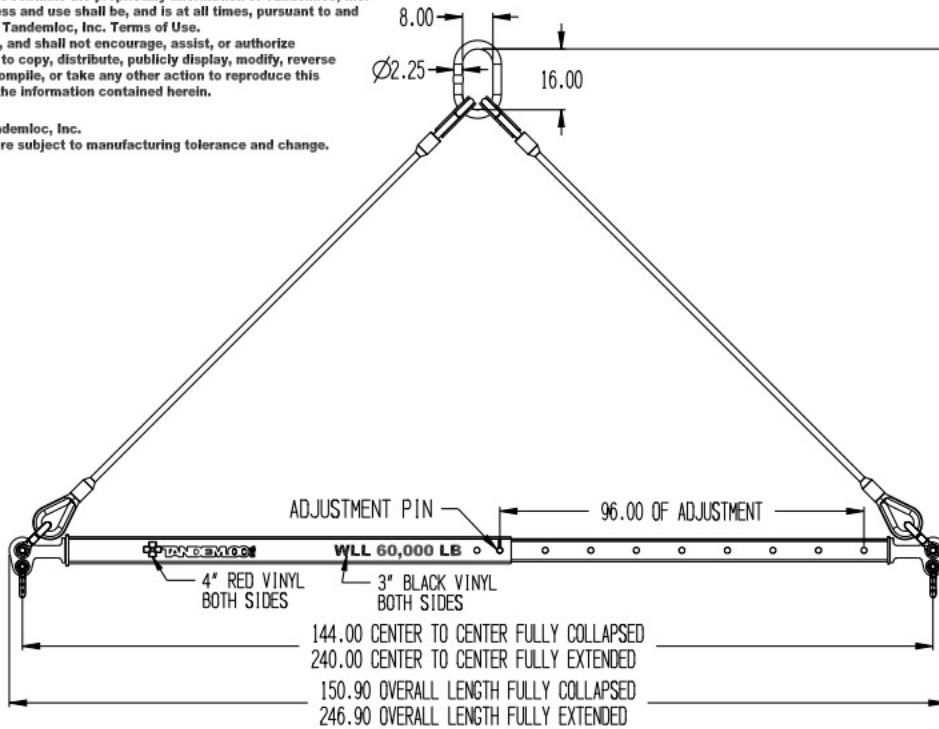

- NOTES:
- PART NO.: AT14A060-240-PA, 144"-240" TELESCOPIC SPREADER
AT14A060-240SPA, 144"-240" TELESCOPIC SPREADER WITH TOP SLING
 - WLL: 60,000 LB. @ 45° MINIMUM
 - PROOF TESTED TO 125% (75,000 LB.) AND CERTIFIED
 - STANDARD SPECIFICATION # EAD21000A APPLIES
 - FINISH: SANDBLAST AND PRIME AND PAINT YELLOW
 - CALCULATED WEIGHT: 811 LB. SPREADER WITH SLING: 1,232 LB.
 - DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20 AND BTH-1, DESIGN CATEGORY B, SERVICE CLASS 0.

** DO NOT SIGN IF CHANGES ARE REQUIRED **
CUSTOMER APPROVAL: _____
DATE: _____

<input type="checkbox"/> 1/2" DIMENSIONS APPLICABLE UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: .125 ±.005 .005 ±.001 .001 ±.001 OVER 11.25 ±.002	<input type="checkbox"/> 1" DIMENSIONS APPLICABLE UNLESS OTHERWISE NOTED. DIMENSIONS ARE IN INCHES & TOLERANCES ARE: 0 TO 4" ±.005 - 4.99" TO 7" ±.007 7.00" TO 11.25" ±.005 OVER 11.25" ±.002	
THIS DRAWING CONTAINS DATA WHICH SHOULD BE KEPT PRIVATE. PLEASE CONTACT US AT THE REQUEST OF TANDEMLOC, INC. FOR A LIMITED OR COMPLETE REVIEW OF THE DESIGN INFORMATION OF TANDEMLOC, INC. IS EXPRESSLY PROHIBITED.		TITL AT14A060-240-PA 144"-240" TELESCOPIC SPREADER
APPROVAL NAME: DJH DATE: 05-20-19	DATE MADE D 65059	REV. NO. SAT14A060-240-PA-1