

KStrong® 9 ft. Micron™ SRL with Tie-back Hook (ANSI) - Harness Connector Included

Model: UFS359002

MICRON™

SRL SERIES

KStrong® 9 ft. Micron™ Tie Back Lightweight SRL with one (1) tie-back hook and a 3 ft. protective sleeve at anchor end (ANSI). Includes one (1) quarter turn locking carabiner (UFC401101).

PHYSICAL PARAMETERS

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Dyneema Webbing with Energy absorber
- Forged tie-back snap hook at bottom end
- Quarter turn locking steel carabiner (UFC401101) included

LENGTH

9 ft. (6 ft. internal, 3 ft. external)

WEBBING

Material: Dyneema Webbing 13/16" (21mm)
Min. Breaking strength: 4500 lbs.

WEIGHT

3.93 lbs. ± 0.22 lbs. (1783 gm ± 100 gm)

USER CAPACITY

OSHA Working Load Capacity: 420 lbs.
ANSI Working Load Capacity: 310 lbs.

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1



Class
1
Anchor at or above dorsal D-ring

OSHA RATED
420 LBS.
MICRON

The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

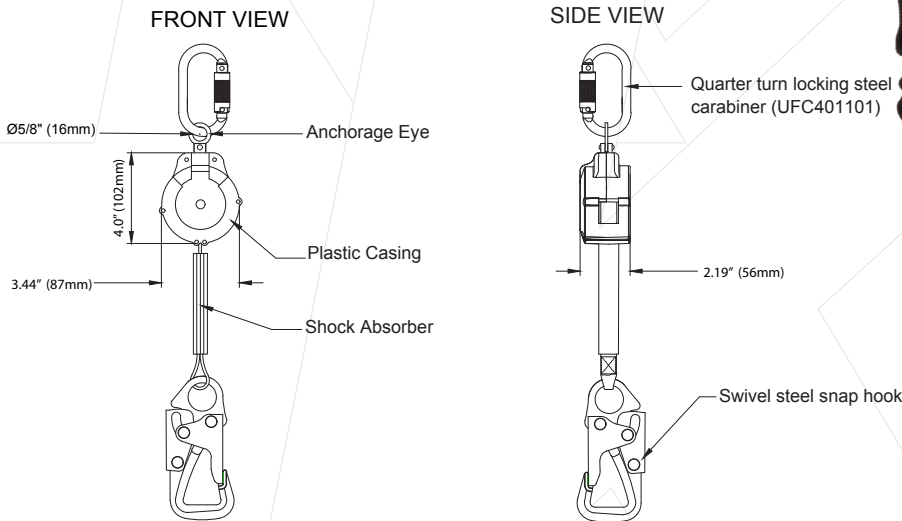

Batch #: _____ Serial #: _____
Date of First Use: _____