

**Standards:** ASME B30.20 Chapter 6 Clamps and EN13155:2020.

**Proof Tested:** 1.5 x WLL.


**Safety factor:** 4:1.

**Temperature range:** -20°C to +120°C.

**Track width range:** 76mm - 405mm.

**Attachment:** Lifting eye to suit shackle.

**Side loads:** Can be used at any angle.

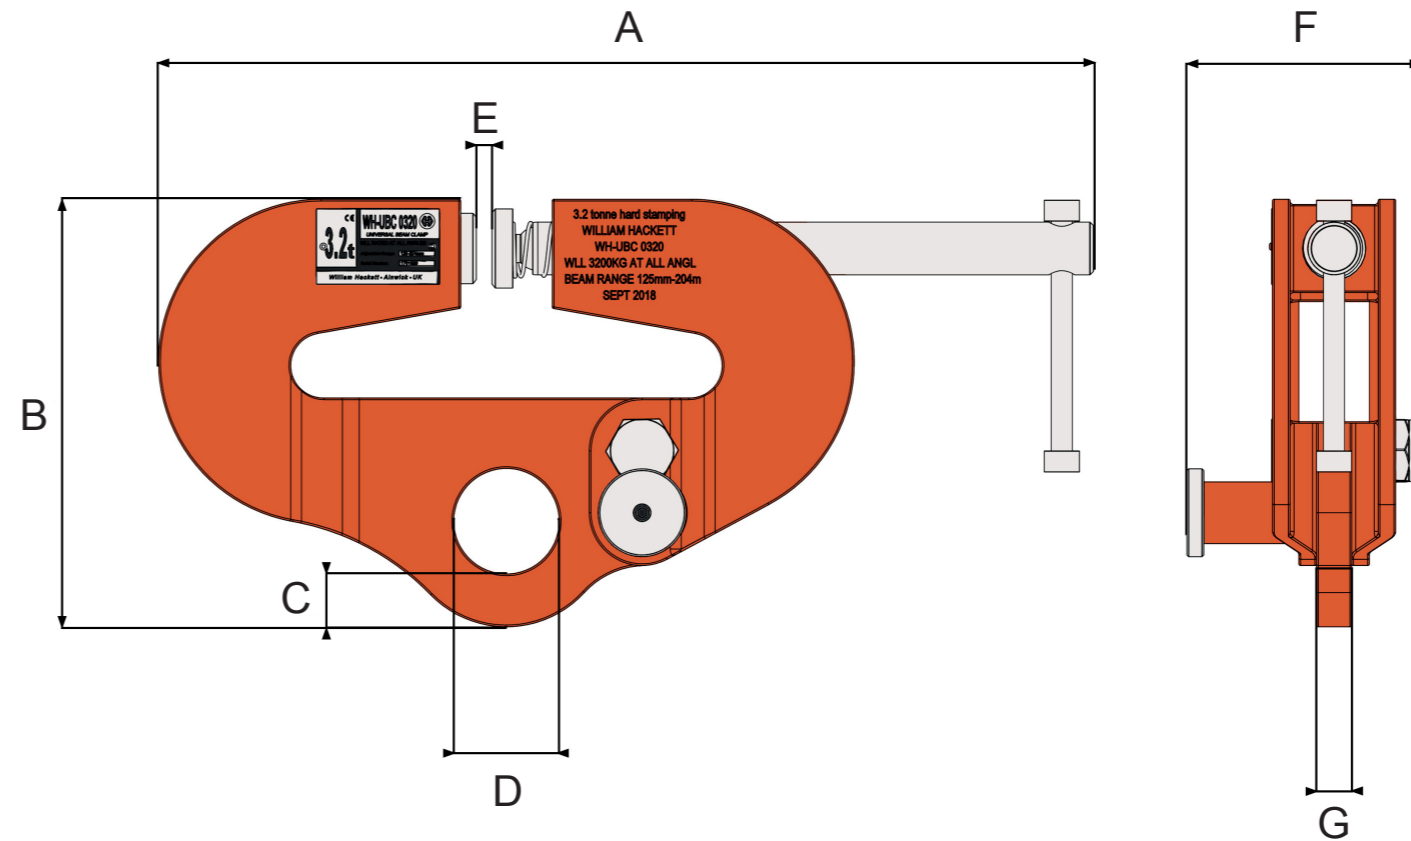

## Specifications

| Part Code  | WLL tonnes | Beam Thickness mm | Beam Width mm | A Min mm | A Max mm | B mm | C mm | D mm | E mm | F mm | G mm | Mass kg |
|------------|------------|-------------------|---------------|----------|----------|------|------|------|------|------|------|---------|
| 028.200    | 2.0        | 25.4              | 76-204        | 420.0    | 450.0    | 203  | 22.5 | Ø58  | 20.0 | 118  | 16   | 9.5     |
| 028.320    | 3.2        | 25.4              | 125-204       | 520.0    | 550.0    | 235  | 28.0 | Ø60  | 33.0 | 133  | 20   | 14.7    |
| 028.500    | 5.0        | 25.4              | 125-305       | 582.5    | 618.5    | 270  | 37.5 | Ø75  | 36.0 | 157  | 24   | 28.3    |
| 028.1000   | 10.0       | 25.4              | 125-305       | 582.5    | 618.5    | 270  | 35.0 | Ø80  | 36.0 | 225  | 44   | 37.8    |
| 028.1000.E | 10.0       | 40.0              | 225-405       | 700.0    | 770.0    | 298  | 38.0 | Ø80  | 70.0 | 230  | 44   | 47.0    |

**Standards:** ASME B30.20 Chapter 6 Clamps and EN13155:2020.

**Proof Tested:** 1.5 x WLL.


**Safety factor:** 4:1.

**Temperature range:** -20°C to +120°C.

**Track width range:** 2.99 inches - 15.94 inches.

**Attachment:** Lifting eye to suit shackle.

**Side loads:** Can be used at any angle.

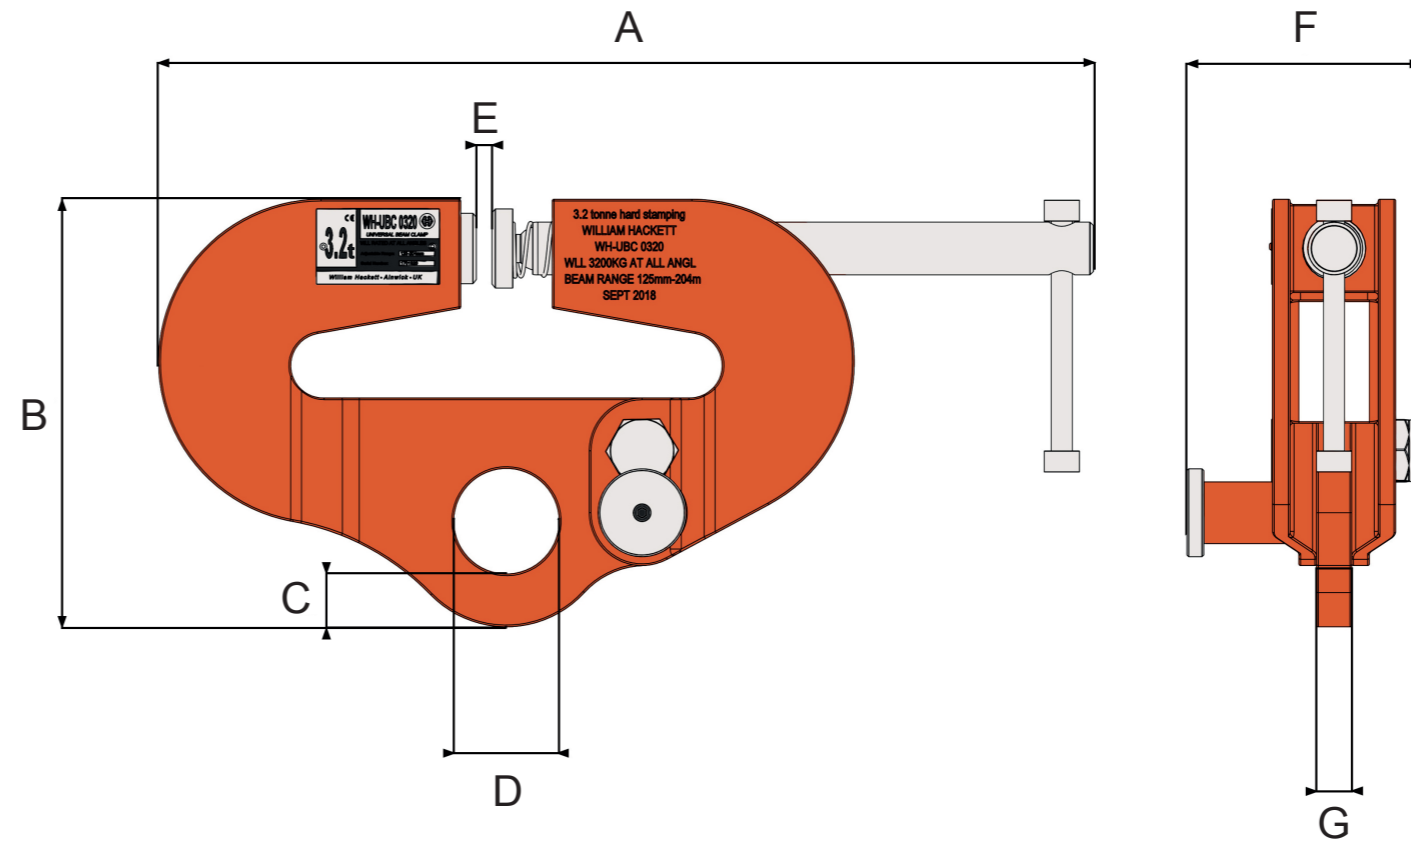

## Specifications

| Part Code  | WLL tons | Beam Thickness inch | Beam Width inch | A Min inch | A Max inch | B inch | C inch | D inch | E inch | F inch | G inch | Mass lbs |
|------------|----------|---------------------|-----------------|------------|------------|--------|--------|--------|--------|--------|--------|----------|
| 028.200    | 2.0      | 1.00                | 2.99 - 8.03     | 16.54      | 17.72      | 7.99   | 0.89   | Ø2.28  | 0.79   | 4.65   | 0.6    | 20.9     |
| 028.320    | 3.2      | 1.00                | 4.92 - 8.03     | 20.47      | 21.65      | 9.25   | 1.10   | Ø2.36  | 1.30   | 5.24   | 0.8    | 32.4     |
| 028.500    | 5.0      | 1.00                | 4.92 - 12.01    | 22.93      | 24.35      | 10.63  | 1.48   | Ø2.95  | 1.42   | 6.18   | 0.9    | 62.4     |
| 028.1000   | 10.0     | 1.00                | 4.92 - 12.01    | 22.93      | 24.35      | 10.63  | 1.38   | Ø3.15  | 1.42   | 8.86   | 1.7    | 83.3     |
| 028.1000.E | 10.0     | 1.57                | 8.86 - 15.94    | 27.56      | 27.56      | 11.73  | 3.15   | Ø3.15  | 2.76   | 9.06   | 1.7    | 103.6    |