


241590016-DW



CRANE SPECIFICATIONS:

CAPACITY:	1000
SPAN:	10'-0"
HEIGHT UNDER BOOM:	10'-0"
MAX HOIST SPEED:	16 FPM
OVERTURNING MOMENT:	13900 FT./LBS.
ANCHOR PULL FORCE:	1986 LBS./PER BOLT
BEAM	W8X18
MAST DIA	8 5/8"
BASEPLATE DIA	2'-0"
BOLT CIRCLE DIA	1'-9"
OVERALL HEIGHT	10'-8"
MODEL NUMBER	350F-1000-10-10

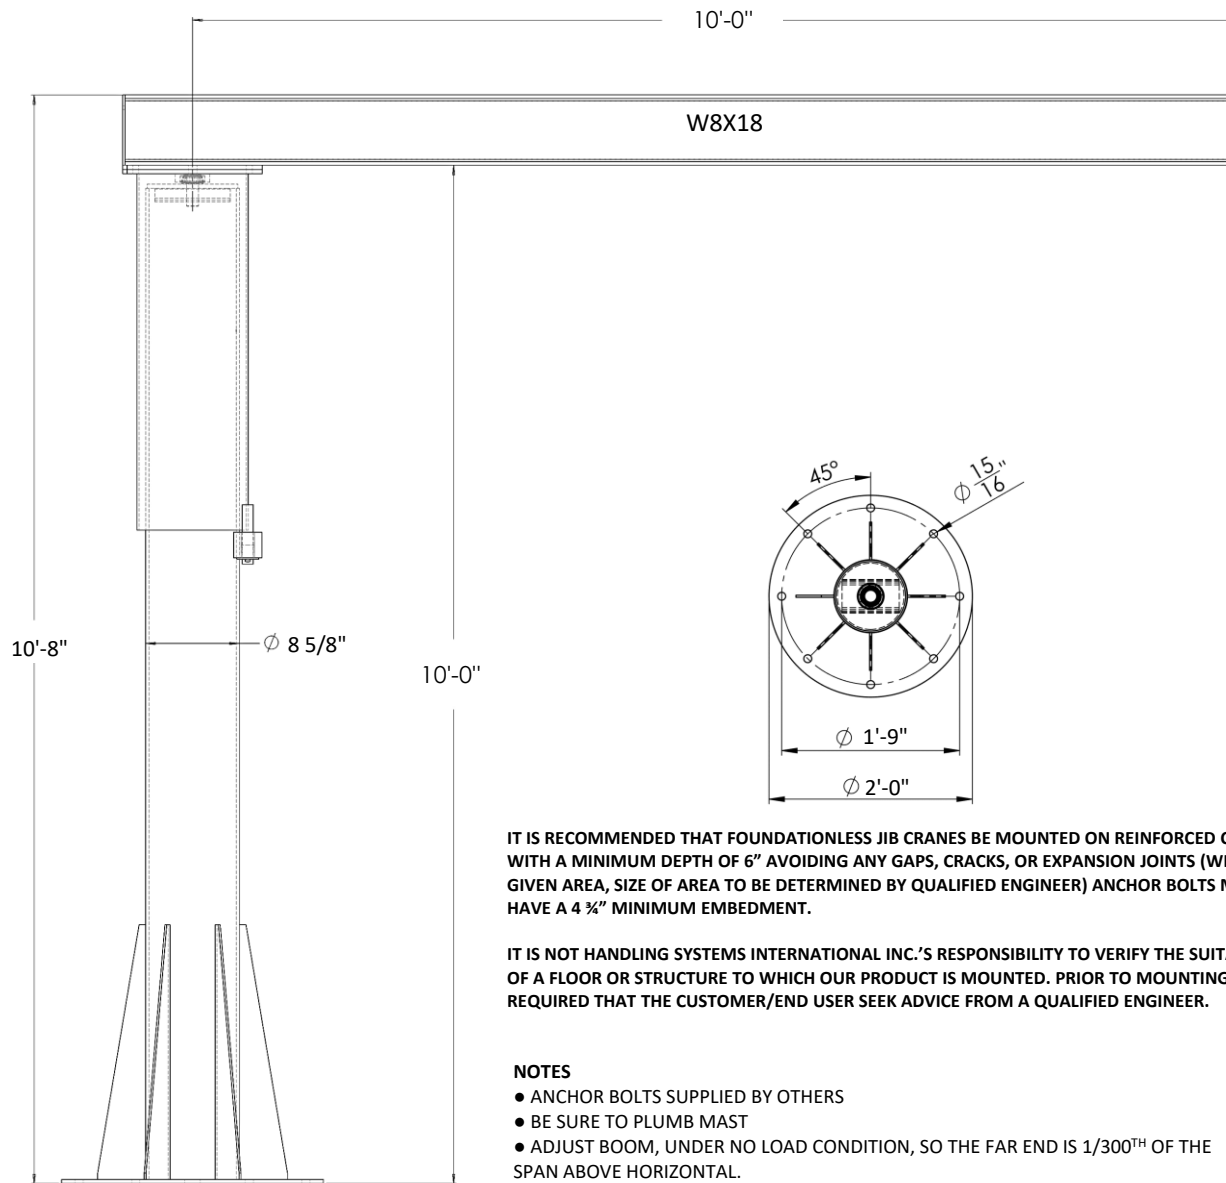

IT IS RECOMMENDED THAT FOUNDATIONLESS JIB CRANES BE MOUNTED ON REINFORCED CONCRETE WITH A MINIMUM DEPTH OF 6" AVOIDING ANY GAPS, CRACKS, OR EXPANSION JOINTS (WITHIN A GIVEN AREA, SIZE OF AREA TO BE DETERMINED BY QUALIFIED ENGINEER) ANCHOR BOLTS MUST HAVE A 4 3/4" MINIMUM EMBEDMENT.

IT IS NOT HANDLING SYSTEMS INTERNATIONAL INC.'S RESPONSIBILITY TO VERIFY THE SUITABILITY OF A FLOOR OR STRUCTURE TO WHICH OUR PRODUCT IS MOUNTED. PRIOR TO MOUNTING, IT IS REQUIRED THAT THE CUSTOMER/END USER SEEK ADVICE FROM A QUALIFIED ENGINEER.

NOTES

- ANCHOR BOLTS SUPPLIED BY OTHERS
- BE SURE TO PLUMB MAST
- ADJUST BOOM, UNDER NO LOAD CONDITION, SO THE FAR END IS 1/300TH OF THE SPAN ABOVE HORIZONTAL.

APPROVAL REQUIRED

Signed: _____ Date: _____

PLEASE CHECK THE APPROPRIATE BOX BELOW

Approved with NO changes

Approved with changes noted (NOTE: CHANGES NOTED MAY INCUR ADDITIONAL COST(S))

Please review changes & send new approval drawings

NOTE: ANY CHANGES MADE TO THE SYSTEM AFTER RECEIPT OF SIGNED APPROVALS ARE SUBJECT TO ADDITIONAL PRICE ADJUSTERS.

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HANDLING SYSTEMS INTERNATIONAL, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HANDLING SYSTEMS INTERNATIONAL, INC. IS PROHIBITED.



MEDIUM DUTY FOUNDATIONLESS JIB CRANE

MODEL: 350F-1000-10-10

DO NOT SCALE FROM DRAWING

TOLERANCES:

DECIMALS (UNLESS OTHERWISE SPECIFIED) - TWO PLACE (.00) +/- .015 - THREE (.000) +/- .005 ANGLES +/- 30 MINUTES - ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.