


241590015-DW

CRANE SPECIFICATIONS:

CAPACITY: 1000 LBS.
 SPAN: 10'-0"
 HEIGHT UNDER BOOM: 10'-0"
 MAX HOIST SPEED: 16 F.P.M
 OVERTURNING MOMENT: 13900 FT./LBS.
 ANCHOR PULL FORCE: 3972 LBS./BOLT

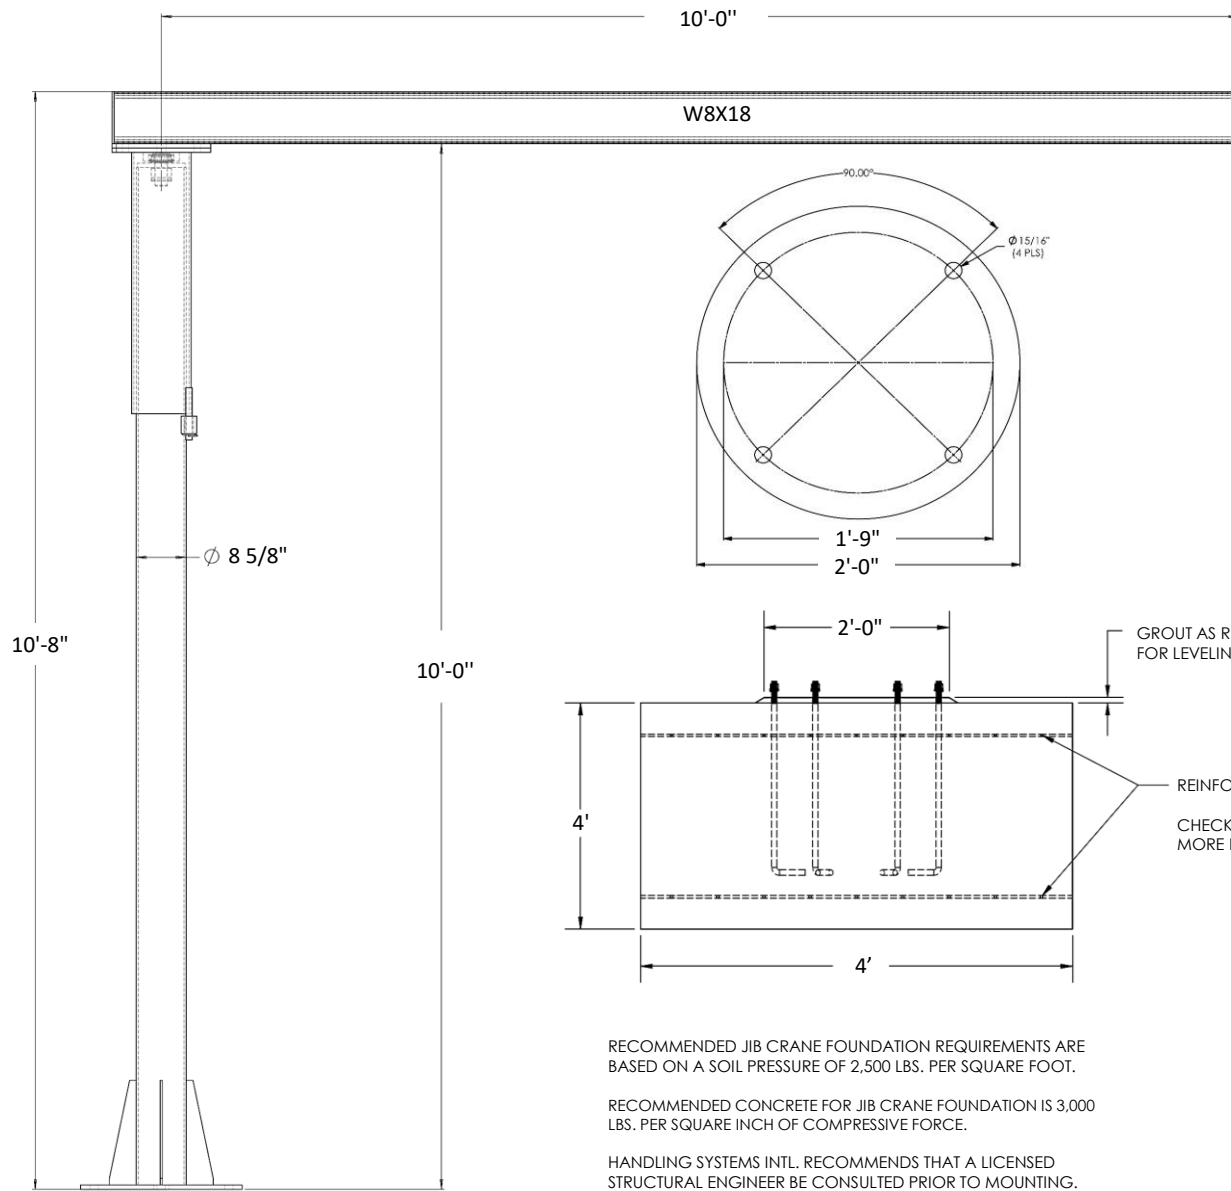

RECOMMENDED JIB CRANE FOUNDATION REQUIREMENTS ARE BASED ON A SOIL PRESSURE OF 2,500 LBS. PER SQUARE FOOT.

RECOMMENDED CONCRETE FOR JIB CRANE FOUNDATION IS 3,000 LBS. PER SQUARE INCH OF COMPRESSIVE FORCE.

HANDLING SYSTEMS INTL. RECOMMENDS THAT A LICENSED STRUCTURAL ENGINEER BE CONSULTED PRIOR TO MOUNTING.

APPROVAL REQUIRED

Signed: _____ Date: _____

PLEASE CHECK THE APPROPRIATE BOX BELOW

- Approved with NO changes
- Approved with changes noted (NOTE: CHANGES NOTED MAY INCUR ADDITIONAL COST(S))
- Please review changes & send new approval drawings

NOTE: ANY CHANGES MADE TO THE SYSTEM AFTER RECEIPT OF SIGNED APPROVALS ARE SUBJECT TO ADDITIONAL PRICE ADDERS.

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HANDLING SYSTEMS INTERNATIONAL, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HANDLING SYSTEMS INTERNATIONAL, INC. IS PROHIBITED.



HANDLING SYSTEMS INTERNATIONAL

MEDIUM DUTY FREESTANDING JIB CRANE

MODEL: 350-1000-10-10

DO NOT SCALE FROM DRAWING

TOLERANCES:

DECIMALS (UNLESS OTHERWISE SPECIFIED) - TWO PLACE (.00) +/- - THREE (.000) +/- - .005 ANGLES +/- 30 MINUTES - ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

PRELIMINARY QUOTE DRAWING