


Heavy Duty Freestanding Four

CRANE SPECIFICATIONS:

CAPACITY:	2000 LBS.
SPAN:	10'-0"
HEIGHT UNDER BOOM:	10'-0"
ANCHOR PULL FORCE:	1301 LBS./BOLT
OVERTURNING MOMENT:	27301 FT./LBS.
APPROX. WEIGHT:	1258 LBS.

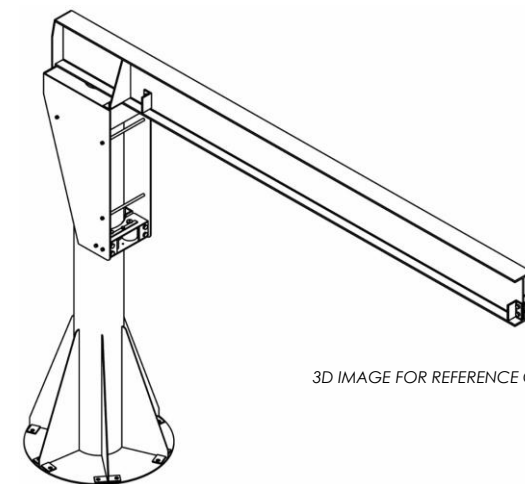

3D IMAGE FOR REFERENCE ONLY

IT IS RECOMMENDED THAT FOUNDATIONLESS JIB CRANES BE MOUNTED ON REINFORCED CONCRETE WITH A MINIMUM DEPTH OF 6" AVOIDING ANY GAPS, CRACKS, OR EXPANSION JOINTS (WITHIN A GIVEN AREA, SIZE OF AREA TO BE DETERMINED BY QUALIFIED ENGINEER) ANCHOR BOLTS MUST HAVE A 4 3/4" MINIMUM EMBEDMENT.

IT IS NOT HANDLING SYSTEMS INTERNATIONAL INC.'S RESPONSIBILITY TO VERIFY THE SUITABILITY OF A FLOOR OR STRUCTURE TO WHICH OUR PRODUCT IS MOUNTED. PRIOR TO MOUNTING, IT IS REQUIRED THAT THE CUSTOMER/END USER SEEK ADVICE FROM A QUALIFIED ENGINEER.

PRELIMINARY QUOTE DRAWING

<p>PROPRIETARY & CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HANDLING SYSTEMS INTERNATIONAL, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HANDLING SYSTEMS INTERNATIONAL, INC. IS PROHIBITED.</p>	 HANDLING SYSTEMS INTERNATIONAL	
	HEAVY DUTY FREESTANDING JIB CRANE	
	MODEL: 351F-2000-10-10	DO NOT SCALE FROM DRAWING
TOLERANCES: DECIMALS (UNLESS OTHERWISE SPECIFIED) - TWO PLACE (.00) +/-.015 - THREE (.000) +/-.005 ANGLES +/- 30 MINUTES - ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.		