

## ROUNDSLING TYPES

### TUFLEX® ROUNDSLINGS

General Information  
Web Slings  
Round Slings

The most versatile *Tuflex* Roundsliding.



**Endless (EN)**

Provides better load control and balance.



**Bridle**

A more rugged and durable *Tuflex* Roundsliding.



**Eye/Eye (EE)**

Offers additional security for heavy lifting.



**Braided**

### HIGH-PERFORMANCE ROUNDSLINGS

Sling Protection  
Wire Rope  
Chain Slings

Safe and ergonomic alternative to steel slings.



**DynaFlex™**

Ideal for suspension of stage sound and lighting equipment.



**Polyester Stage Sling**

Lift up to 1 million pounds with *KeyFlex* Ultra.



**KeyFlex™**

Superior flexibility, strength and heat resistance.



**SteelFlex™**

## DIRECT CONNECT HOOKS

Rigging Hardware  
Mesh Slings  
Cargo Control

Direct Connect Hooks are the quickest and easiest way to add hooks to *Tuflex*® roundslings and web slings at your job site. No tools or extra parts are needed.

For *Tuflex* slings, just match the color-coded hook to the same color *Tuflex* sling, and you are ready to go. Rated capacities are the same for both the hook and the *Tuflex* roundsliding.


### Features and Benefits

- Rugged: The alloy steel hook and latch are forged for superior toughness.
- Color-coded hook matches *Tuflex* color and capacity.
- *Web-Trap*™ design keeps sling in place, ready to use.
- Four hook sizes to match *Tuflex* sizes EN30 (Purple), EN60 (Green), EN90 (Yellow) and EN150 (Red).
- Can be used with 1" and 2" web slings.
- Quick connections with no tools needed.
- Increases the life of the sling by reducing wear at the bearing point.

| Part No.* | Color  | Rated Capacity (lbs.) | Tuflex | Web Slings  |       | Weight (lbs.) |
|-----------|--------|-----------------------|--------|-------------|-------|---------------|
|           |        |                       |        | Width (in.) | Plies |               |
| DCH1      | Purple | 2,600                 | EN30   | 1           | 1     | 1.54          |
| DCH2      | Green  | 5,300                 | EN60   | 1           | 2     | 2.65          |
| DCH3      | Yellow | 8,400                 | EN90   | 2           | 1 & 2 | 4.85          |
| DCH4      | Red    | 13,200                | EN150  | -           | -     | 9.90          |

\* Add an 'L' to end of part number to order replacement latch.

| Part No. | Dimensions (in.) |      |      |      |      |      |      |      |      |      |      |
|----------|------------------|------|------|------|------|------|------|------|------|------|------|
|          | A                | B    | C    | D    | E    | F    | G    | H    | I    | J    | K    |
| DCH1     | 3.38             | 1.56 | 0.91 | 4.84 | 0.47 | 0.81 | 0.67 | 3.07 | 1.22 | 0.70 | 1.13 |
| DCH2     | 4.00             | 1.75 | 1.28 | 5.83 | 0.75 | 1.07 | 0.83 | 3.58 | 1.57 | 0.88 | 1.39 |
| DCH3     | 4.63             | 2.13 | 1.40 | 6.89 | 0.83 | 1.26 | 0.98 | 4.45 | 1.97 | 1.00 | 1.76 |
| DCH4     | 5.75             | 2.34 | 1.83 | 8.78 | 1.63 | 1.60 | 1.42 | 5.21 | 2.34 | 1.23 | 2.21 |

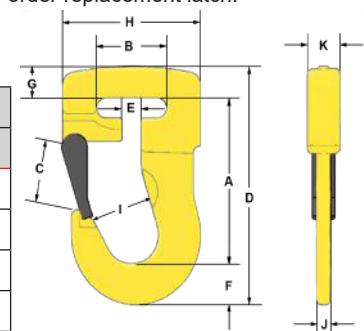

Hoist Rings  
Plate Clamps  
Lifting Devices