
GROUND LIFT SCISSOR TABLE - EHLTG-5250-4-36

APPROX WEIGHT: 1406.47 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

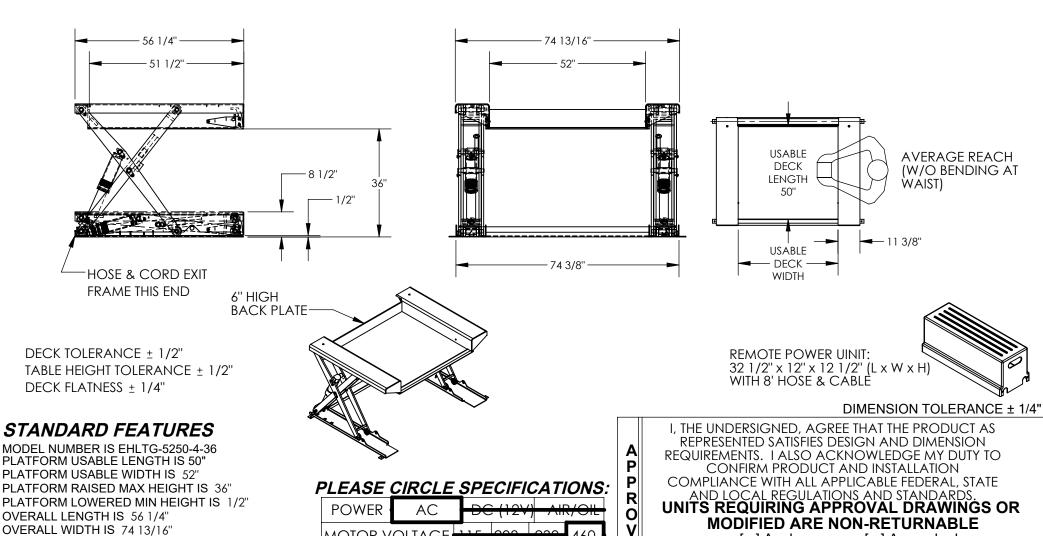

PLATFORM USABLE WIDTH IS 52" PLATFORM RAISED MAX HEIGHT IS 36" PLATFORM LOWERED MIN HEIGHT IS 1/2" OVERALL LENGTH IS 56 1/4" OVERALL WIDTH IS 74 13/16" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 4,000 LBS REMOTE POWER UNIT 2 HP MOTOR (@ 3 PHASE) 3/4 HP MOTOR (@ 1 PHASE) CONTROL IS FOOT SWITCH, 2 PEDAL, NEMA 1 WITH MINIMUM 8' USABLE STRAIGHT CORD SAFETY MAINTENANCE PROPS DISPLACEMENT STYLE CYLINDERS **INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSE** IN EACH CYLINDER UPPER TRAVEL LIMIT SWITCH **ELECTRIC PINCH POINT GUARD** UNITS HAVE 2' TEST LEAD AND PIG TAIL

DURABLE LIQUID PAINT BLUE FINISH

MOTOR VOLTAGE 115

DEDICATED CIRCUIT REQUIRED 60Hz MOTOR PHASE

THREE FOOT CONTROL

SPECIAL FEATURES

NONE

MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:				P.O.# X
VESTIL MANUFACTURING				W.O.# X
DRAWN BY:	V.GONI		70072010	SALES: X
REFERENCE: X			SCALE: 1:32	
QUOTED LEAD T	IME: ## WFFKS	QUOTE #	Χ	04-007-053