
ELECTRIC/HYDRAULIC CORNER TILTER - EMC-4848-2 *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

APPROX WEIGHT: 556.32 lbs.

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

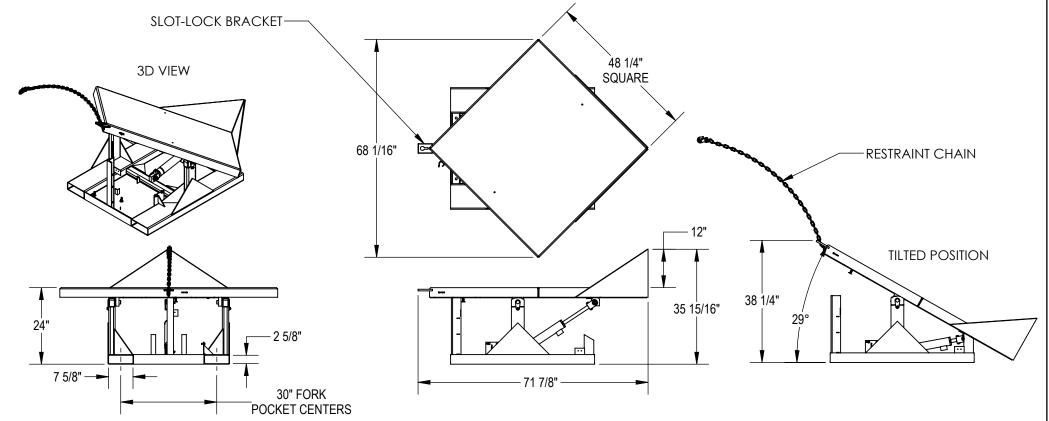

STANDARD FEATURES MODEL NUMBER IS EMC-4848-2

OVERALL WIDTH IS 68 1/16" **USABLE WIDTH IS 48' OVERALL LENGTH IS 71 7/8" USABLE LENGTH IS 48'** OVERALL HEIGHT IS 35 15/16" TILTED HEIGHT IS 38 1/4" MAX CAPACITY IS 2000 LBS PLATFORM LEVEL HEIGHT IS 24" MAXIMUM TILT ANGLE IS 29° 2 HP POWER UNIT ALL STEEL CONSTRUCTION WELDING TO MEET AWS CHROME PLATED CYLINDERS 3000 PSI HYDRAULIC RATING WARNING: CHECK STATE AND LOCAL CODES!! SAFETY SLOT-LOCK CHAIN RESTRAINT BRACKET

VESTIL ROYAL BLUE FINISH USABLE FORK POCKET - 2 5/8"H X 7 5/8"W

SPECIAL FEATURES **NONE**

30" FORK POCKET CENTERS

DURABLE LIQUID PAINT

PLEASE CIRCLE SPECIFICATIONS:

POWFR AC AIR/OIL MOTOR VOLTAGE 115 208 460 DEDICATED CIRCUIT REQUIRED **MOTOR PHASE SINGLE THREE** CONTROL * **FOOT** HAND ~ ALL BATTERY CHARGERS ARE 115V AC ~ BATTERY CHRG. **ON-BOARD REMOTE** CHRG. INDICATOR YES NO * AVAILABLE AT ADDITIONAL COST

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

AND LOCAL REGULATIONS AND STANDARDS UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As marked [] As drawn

Signed:

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

R

0

V

Α

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

W.O.# DRAWN BY: MTS SALES: X 02/20/2014

REFERENCE: X SCALE: 1:30 FILE NAME:

Quoted lead time: $_{\mathbf{Y}}$ QUOTE # 38-007-034

Χ

DIMENSION TOLERANCE ± 1/4"