


HHBD02SK-01 + WPC02

2 TON SINGLE SPEED WITH MOTORIZED TROLLEY
3-PHASE 230V/460V

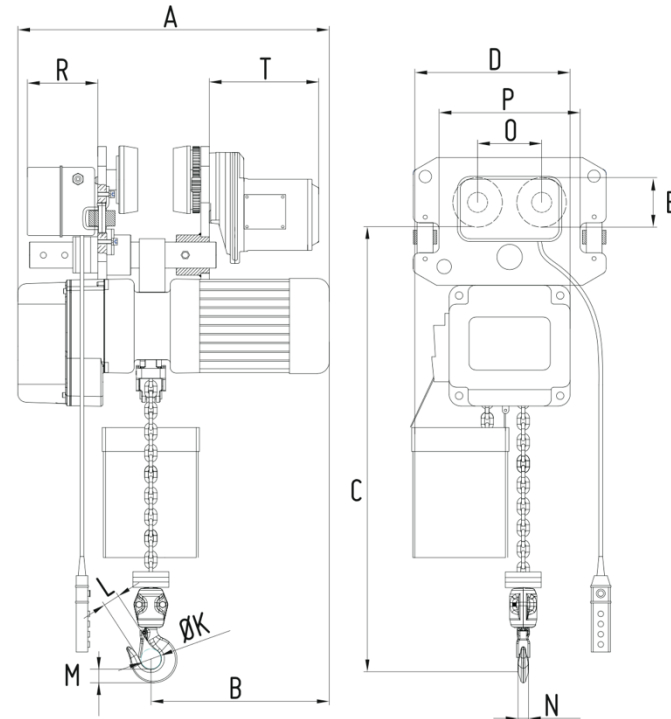

Product Code	Capacity	Headroom (C)	A	B	D	E	K	L	N	O	P	R	T
	tons	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches
HHBD02SK-01 +WPC02	2	22	25.3	12.9	12.6	4.7	1.9	1.3	1.1	5	9.3	5.6	9

Product Code	Capacity	Standard Lift Height	Push Button Cord	Lifting Speed	Motor Output	Control Voltage	Lifting Motor Rated		Load Chain Size Ø	Chain Fall Lines	Trolley Speed	Trolley Output	Trolley Motor Rated		Trolley Minimum Curve Radius	Trolley Flange Width	Net Weight
							Current (amps)						Current (amps)				
	tons	feet	feet	ft/min	hp	Volts	@230v	@460v	mm	ft/min	hp	@230v	@460v	inches	inches	lbs.	
HHBD02SK-01 +WPC02	2	20	17	14.7	2	110	8.8	5.1	Ø 10 x 30	1	48	0.5	3.2	1.6	35.4	3.23-12	277.8