


HHBDSK05-02D + WPC05D

5 TON DUAL SPEED WITH MOTORIZED TROLLEY
3-PHASE 230V/460V

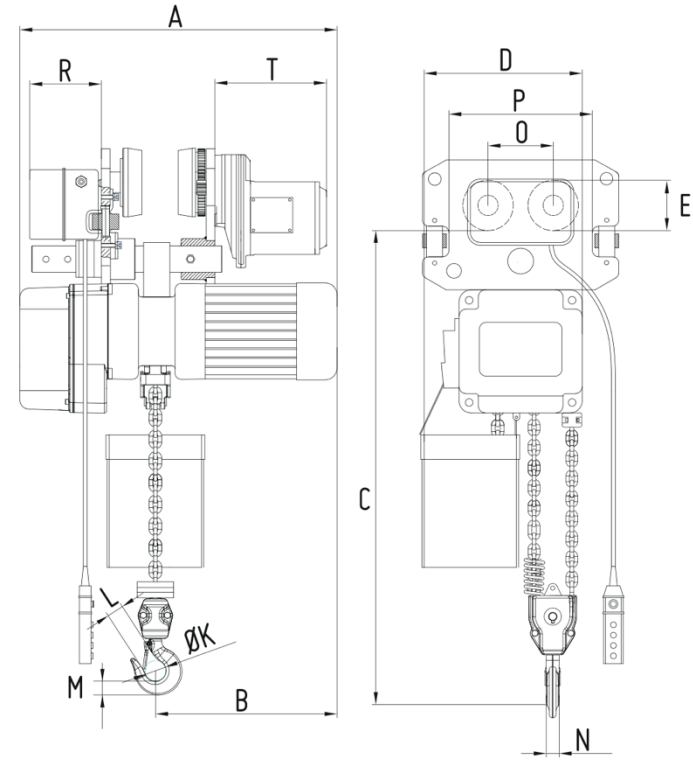

Product Code	Capacity	Headroom (C)	A	B	D	E	K	L	N	O	P	R	T
	tons	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches
HHBDSK05-02D +WPC05D	5	37	31	15.5	18.3	5.5	2.4	1.76	1.69	6.1	11.6	5.6	11

Product Code	Capacity	Standard Lift Height	Push Button Cord	Lifting Speed	Motor Output	Control Voltage	Lifting Motor Rated		Load Chain Size Ø	Chain Fall Lines	Trolley Speed	Trolley Output	Trolley Motor Rated		Trolley Minimum Curve Radius	Trolley Flange Width	Net Weight
							Current (amps)						Current (amps)				
	tons	feet	feet	ft/min	hp	Volts	@230v	@460v	mm		ft/min	hp	@230v	@460v	inches	inches	lbs.
HHBDSK05-02D +WPC05D	5	20	17	12 / 3.6	4	110	17 / 10.5	10.5 / 8	Ø 11.2 x 34	2	60 / 21	1	5	2.5	98	4.33-12	615.1