




## Hack10 Clevis Self Locking Hook

All William Hackett Hack10 lifting components comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

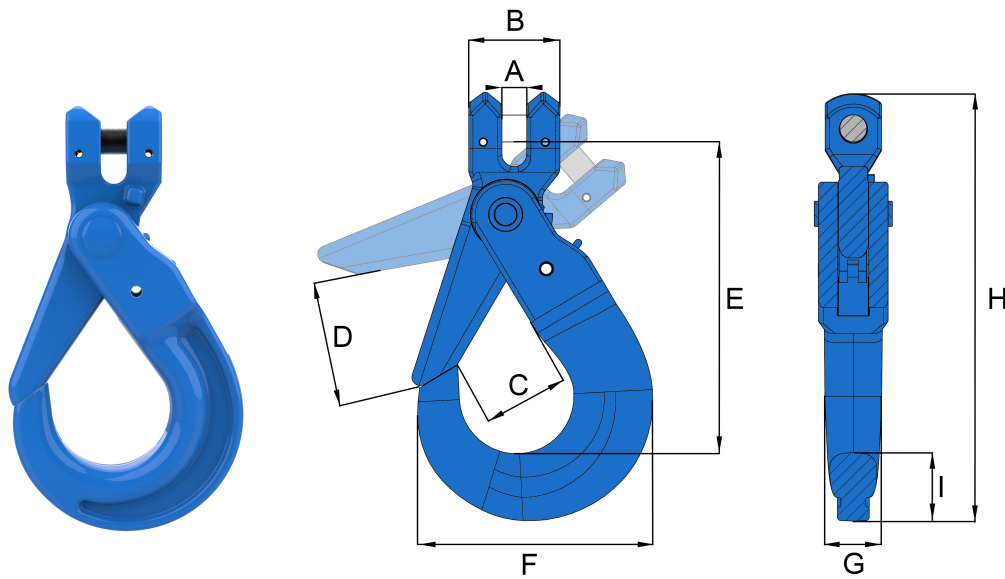

## METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	WLL tonnes	Box Quantity	Mass kg
10-H05-06	6	8.0	32.0	28.0	31.5	96.0	73.0	15.0	131.0	21.0	1.4	40	0.5
10-H05-08	8	9.5	36.0	36.0	40.0	121.0	90.0	20.0	163.0	27.0	2.5	20	0.9
10-H05-10	10	12.0	46.0	45.0	46.0	144.0	108.0	26.0	194.0	30.0	4.0	15	1.6
10-H05-13	13	15.0	59.0	53.6	66.0	182.0	137.0	32.5	251.0	41.0	6.7	6	2.9
10-H05-16	16	18.5	70.0	61.0	75.0	220.0	168.0	38.0	303.0	51.0	10.0	4	5.0
10-H05-20	20	25.0	85.0	76.5	80.0	235.0	190.0	50.0	337.0	64.0	16.0	2	8.6
10-H05-22	22	25.5	98.0	76.0	104.6	271.0	202.0	52.0	386.0	67.0	19.0	2	12.1

# IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	WLL lbs	Box Quantity	Mass lbs
10-H05-06	1/4	0.31	1.26	1.10	1.24	3.78	2.87	0.59	5.16	0.83	3086	40	1.10
10-H05-08	5/16	0.37	1.42	1.42	1.57	4.76	3.54	0.79	6.42	1.06	5511	20	1.98
10-H05-10	3/8	0.47	1.81	1.77	1.81	5.67	4.25	1.02	7.64	1.18	8818	15	3.52
10-H05-13	1/2	0.59	2.32	2.11	2.60	7.16	5.39	1.28	9.88	1.61	14771	6	6.39
10-H05-16	5/8	0.73	2.75	2.40	2.95	8.66	6.61	1.50	11.93	2.01	22046	4	11.02
10-H05-20	3/4	0.98	3.35	3.01	3.15	9.25	7.48	1.97	13.27	2.52	35274	2	18.95
10-H05-22	7/8	1.00	3.86	2.99	4.12	10.67	7.95	2.05	15.19	2.64	41887	2	26.67



**William Hackett**

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU  
 Email: [liftingsales@williamhackett.co.uk](mailto:liftingsales@williamhackett.co.uk) Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204

