

KStrong® Steel Swivel Snap hook with load indicator (ANSI)

Model: UFC404500

DESIGN

- Gate opening 0.79" (20mm).
- Auto closing & auto locking type steel snap hook.
- Locking by spring operated attachments.
- Swivel ring as the captive eye.
- Unique Load Indicator to indicate that hook has already arrested a fall.

MATERIAL

Material: Alloy Steel | Process: Forged

FINISH

Galvanized with Golden Yellow / Silver passivation.

MINIMUM BREAKING STRENGTH

5000 lbs. (2268kg)

GATE FACE STRENGTH

3600 lbs. (1633kg)

GATE SIDE STRENGTH

3600 lbs. (1633kg); Minor Axis: 3600 lbs. (1633kg)

WEIGHT


1.13 lbs. ± 0.02 lbs. (513 gm. ± 10 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.12-2009 & CSA Z259.12

CLOSED CONDITION

OPEN CONDITION

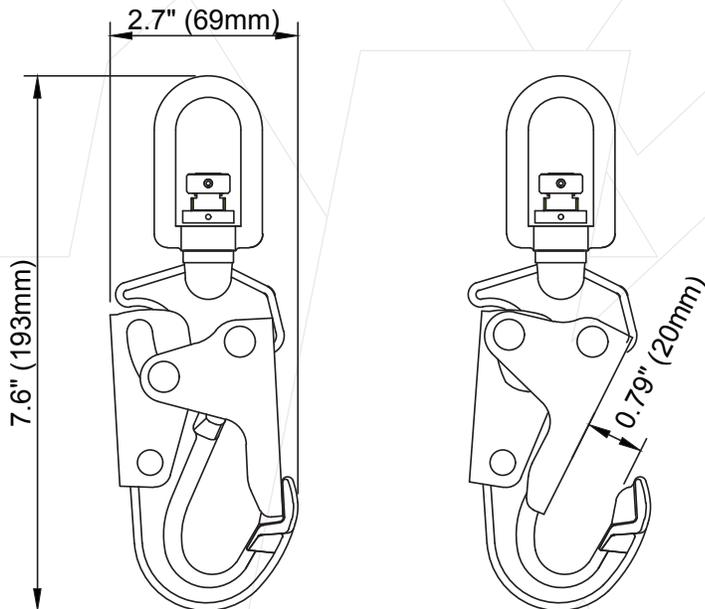

Meets or Exceeds ANSI Z359.12-2009 & CSA Z259.12

