


DESCRIPTION

KStrong 5K Drop Thru Anchor with Swivel D-ring - 4" or 6" Round Plate and variable cable length.
A removable and reusable anchor designed for overhead applications. Cable length varies.

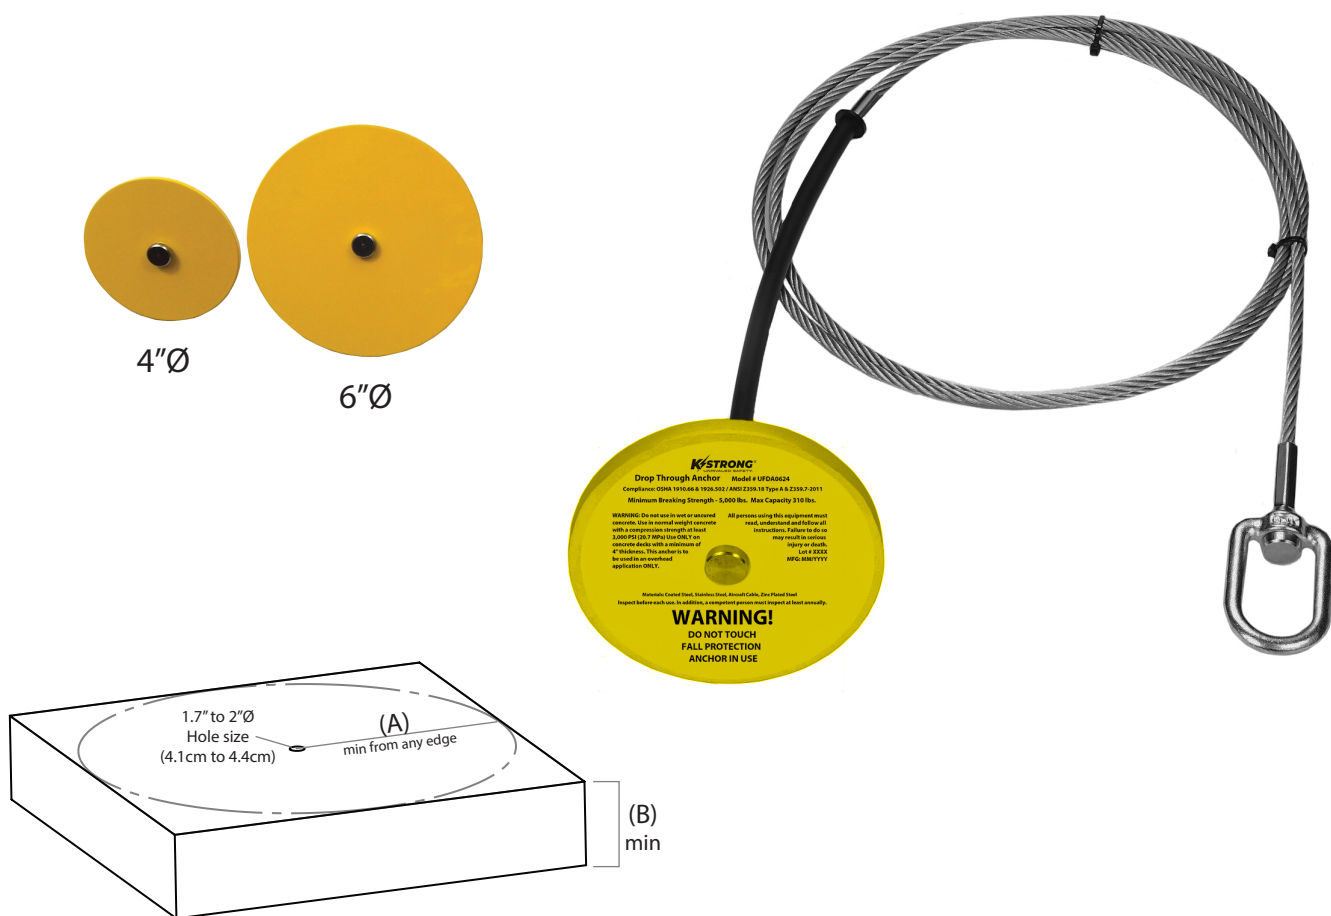

HOLE REQUIREMENT CHART

Material:	(A)" Minimum distance from edge/corner	(B)" thickness
Concrete	12" (30.5 cm)	4" (10 cm)
Steel	4" (10 cm)	.25" (.635 cm)

SPECIFICATIONS



UTS

5,000-lbf / 22kN



Max User Weight

310-lbs / 140kg



Working Load

1000-lbs / 454kg

MATERIALS



Plate

Coated Steel



Swivel Ring

Zinc Plated Steel



Cable

Aircraft Cable



Tubing

Polyurethane

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	LENGTH	PLATE SIZE
UFDA0472	Concrete / Steel	Yellow	5,000-lbf (22kN)	6 FT	4 in
UFDA0624	Concrete / Steel	Yellow	5,000-lbf (22kN)	2 FT	6 in
UFDA0672	Concrete / Steel	Yellow	5,000-lbf (22kN)	6 FT	6 in
UFDA6102	Concrete / Steel	Yellow	5,000-lbf (22kN)	8.5 FT	6 in