


16mm (5/8") Grade 10 Four Leg Chain Sling

WLL 21.0t 0-45°, 15.0t 45-60°
(WLL 46297lbs 0-45°, WLL 33069lbs 45-60°)

Part Code	Description	Qty.
10-H02-08	Sub Assembly	1
10-H03-08	Component Connector	8
10-H06-08	Eye Grab Hook	4
ASV.160.5	Grade 10 Chain to suit HOL	4
10-H04-08	Clevis Sling Hook	4

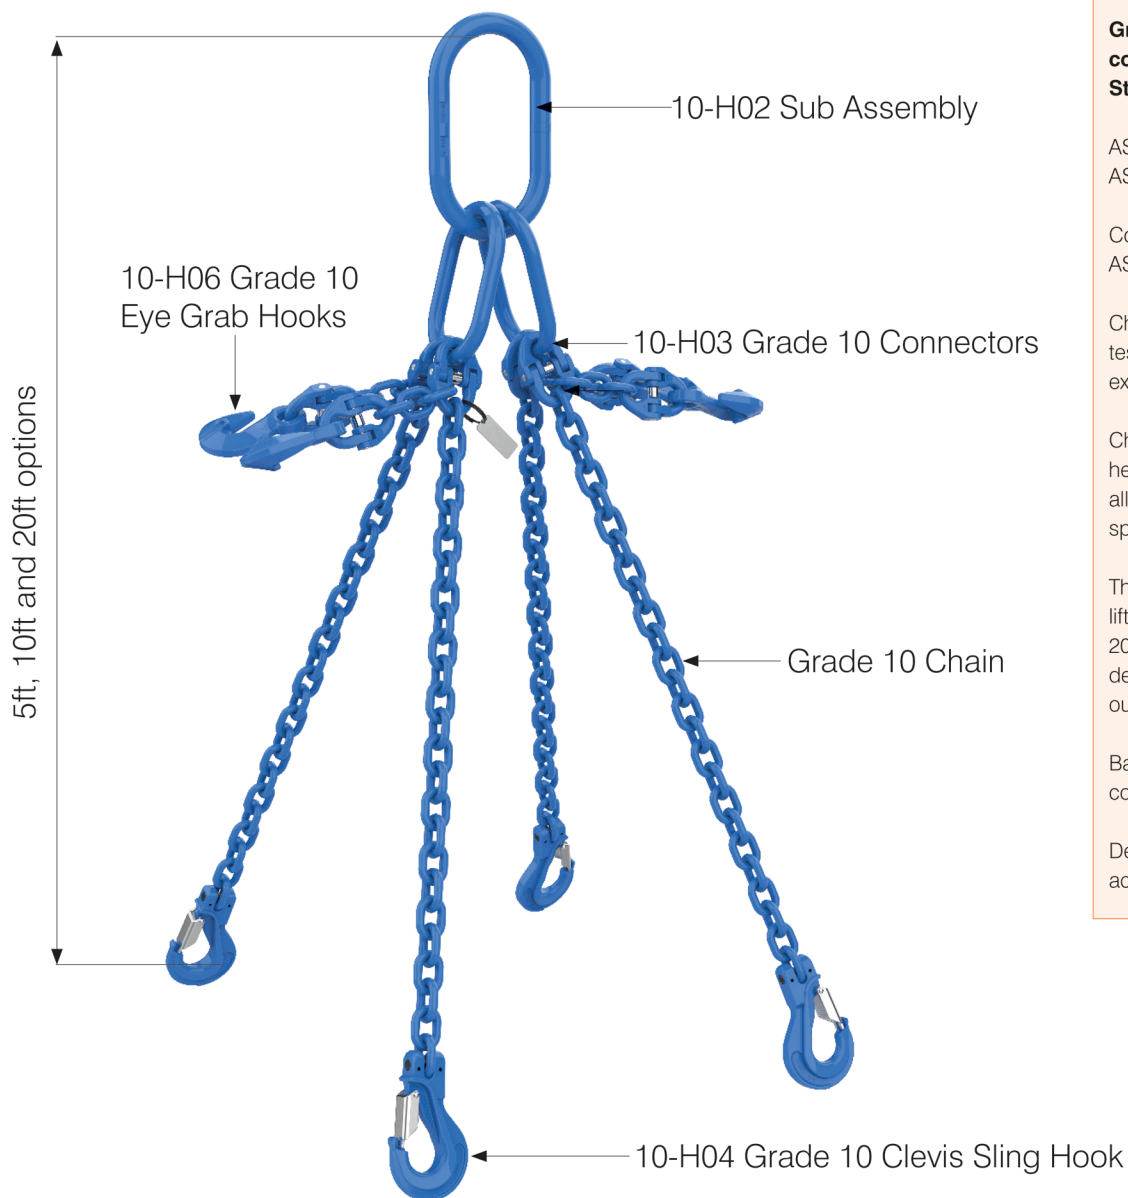

Grade 10 Alloy Chain Slings comply with the following Standards:

ASTM B30.9.2018 – G10 Slings
ASTM 973 – G10 Chain

Components – BS EN 1677-1,
ASTM 952/A952M, ASME B30.26

Chain & Components- Proof tested to 2.5 times WLL – This exceeds the ASTM requirements

Chain - Tensile strength following heat treatment meets or exceeds all existing ASTM & OSHA specification requirements

These products are suitable for lifting operations from -40°C to 200°C. Consult our technical department for operations outside of this range

Batch markings on all components for traceability

Declaration of Conformity accompanies each sling

GRADE 10 FOUR LEG CHAIN SLING



William Hackett