

EXTRUDED ALUMINUM HOSE & CABLE CROSSOVER RAMP - LHCR-36-Y APPROX WEIGHT: 11.52 lbs. Does not include weight of power of the contraction of the con

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

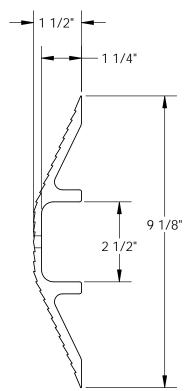

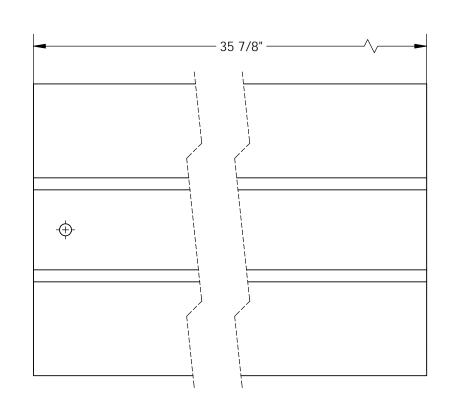

Ρ

Ρ

R

0

## **NOTE:** HOLE IS FOR POWDER COATED UNITS ONLY

## **STANDARD FEATURES** SPECIAL FEATURES

MODEL NUMBER: LHCR-36-Y

SINGLE WHEEL CAPACITY: 10,000 LBS

OVERALL WIDTH: 9 1/8"
OVERALL LENGTH: 35 7/8"
OVERALL HEIGHT: 1 1/2"
USABLE WIDTH: 2 1/2"
USABLE HEIGHT: 1 1/4"

TOUGH BAKED IN POWDER COATED

YELLOW FINISH

NONE

V Date: Signed: Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING P.O.# X DISTRIBUTOR'S NAME: FOR INTERNAL USE ONLY W.O.# X PROJECT SIGN OFF VESTIL MANUFACTURING **SALES** SALES: X K.YEAKLE 05/10/12 ENG. reference: X SCALE: 1:12 FILE NAME: FAB. QUOTED LEAD TIME: Y OUOTF # 29-007-046-003 **POWER** Χ

[ ] As drawn

DIMENSION TOLERANCE ± 1/2"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As marked