

VRS-STARPOINT

VARIO-Ring bolt.

FEATURES AND BENEFITS:

- Much higher WLL than eye bolts in accordance with DIN 580.
- Star profile key for simple installation and removal.
- Higher working load limits possible thanks to optimized attachment or application.
- Variable bolt lengths available for use in threaded and through bores.



VRS-F (with wrench)



VRS (without wrench)



VRS-STARPOINT.

The VRS-STARPOINT in octagonal shape aligns itself around the installed bolt into the load force direction. This excludes dangerous untightening (like rigid DIN-580 bolts). Thanks to high-strength quenched and tempered steels and ICE-Bolt, the modern lifting point allows a 4 to 5 times higher WLL or half the diameter size than DIN 580. Current tests of the Employer's Insurance Association (BG) also confirm the positive tests in the worst critical loading direction of 90° in the load ring plane.

If the lifting points are only used during the manufacturing of a machine component, choose the VRS-STARPOINT variant with integrated Easy-Fit wrench. It can be installed and removed easily, quickly and without additional tools.

The STARPOINT is available in several bolt lengths with corresponding washers and crack detected lock nuts in different thread types.

THE VRS-STARPOINT IN DETAIL.

<p>RUD ICE-Bolt. Up to 1" (M24).</p> 	<p>Rotatable through 360°.</p> <p>Simple adjustment in load direction.</p> 	<p>Variable bolt length.</p> 
<p>WLL Y</p> 	<p>WLL Z</p> 	<p>Star profile key –</p> <p>metric UNC inch thread</p> 




VRS-F- / VRS-STARPOINT

Metric thread with and without key.

VRS-F- / VRS-STARPOINT – METRIC WITH (VRS-) AND WITHOUT KEY – DESIGN FACTOR 4:1.

Type	WLL [t]	Weight VRS-F (kg/unit)	Weight VRS (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Order no. VRS-F	Order no. VRS
VRS-F-M6 / VRS-M6	0.1	0.07	0.07	28	9	7	20	23	28	13	37	9	M6	6	5	7900906	7900909
VRS-F-M8 / VRS-M8	0.3	0.12	0.1	35	11	9	25	25	30	16.3	47	12	M8	6	10	8500911	7100554
VRS-F-M10 / VRS-M10	0.4	0.12	0.1	35	11	9	25	25	30	16.3	47	15	M10	6	10	7104029	7100555
VRS-F-M12 / VRS-M12	0.75	0.19	0.19	42	13	10	30	30	34	19.8	56	18	M12	8	25	7101313	7100556
VRS-F-M14 / VRS-M14	0.75	0.22	0.2	42	13	10	30	30	34	19.8	56	18	M14	8	30	7999330	7100557
VRS-F-M16 / VRS-M16	1.5	0.36	0.33	49	15	13	35	36	40	23.5	65	24	M16	10	60	7101314	7100558
VRS-F-M18 / VRS-M18	1.5	0.37	0.33	49	15	13	35	36	40	23.5	65	24	M18	10	60	7903387	7992219
VRS-F-M20 / VRS-M20	2.3	0.6	0.54	58	17	16	40	41	50	29.3	76	30	M20	12	115	7101315	7100559
VRS-F-M22 / VRS-M22	2.3	0.62	0.56	58	17	16	40	41	50	29.3	76	30	M22	12	125	7992197	7904625
VRS-F-M24 / VRS-M24	3.2	1.06	0.97	70	20	19	49	51	60	35	92	36	M24	14	190	7101316	7100560
VRS-M24-SL2M	3.2	-	1	70	20	19	49	51	60	35	92	48	M24	14	190	-	7990615
VRS-F-M27 / VRS-M27	3.2	1.08	1	70	20	19	49	51	60	35	92	36	M27	14	250	7994138	7904626
VRS-F-M30 / VRS-M30	4.5	2.08	1.92	87	26	24	60	66	75	44	114	45	M30	17	330	7101317	7100561
VRS-F-M33 / VRS-M33	4.5	2.13	1.97	87	26	24	60	66	75	44	114	45	M33	17	350	7993439	7904627
VRS-F-M36 / VRS-M36	7	3.5	3.3	104	32	29	73	76	98	53	135	54	M36	22	590	7984201	7984198
VRS-F-M36-SL2M	7	-	3.3	103	32	29	73	76	98	53	135	72	M36	22	590	-	7991247
VRS-F-M42 / VRS-M42	9	5.4	5	122	36	34	85	86	109	62	157	63	M42	24	925	7984202	7984199
VRS-F-M48 / VRS-M48	12	8.1	7.6	138	42	38	94	101	128	70	179	72	M48	27	1,400	7984203	7984200
VRS-F-M56 / VRS-M56*	16	13	11.9	161	50	44	110	112	145	82	209	84	M56	32	1,400	7910836	7907508
VRS-F-M64 / VRS-M64*	20	17.8	16.2	176	55	48	120	122	157	90	228	96	M64	36	1,400	7910837	7907509

Subject to technical changes!

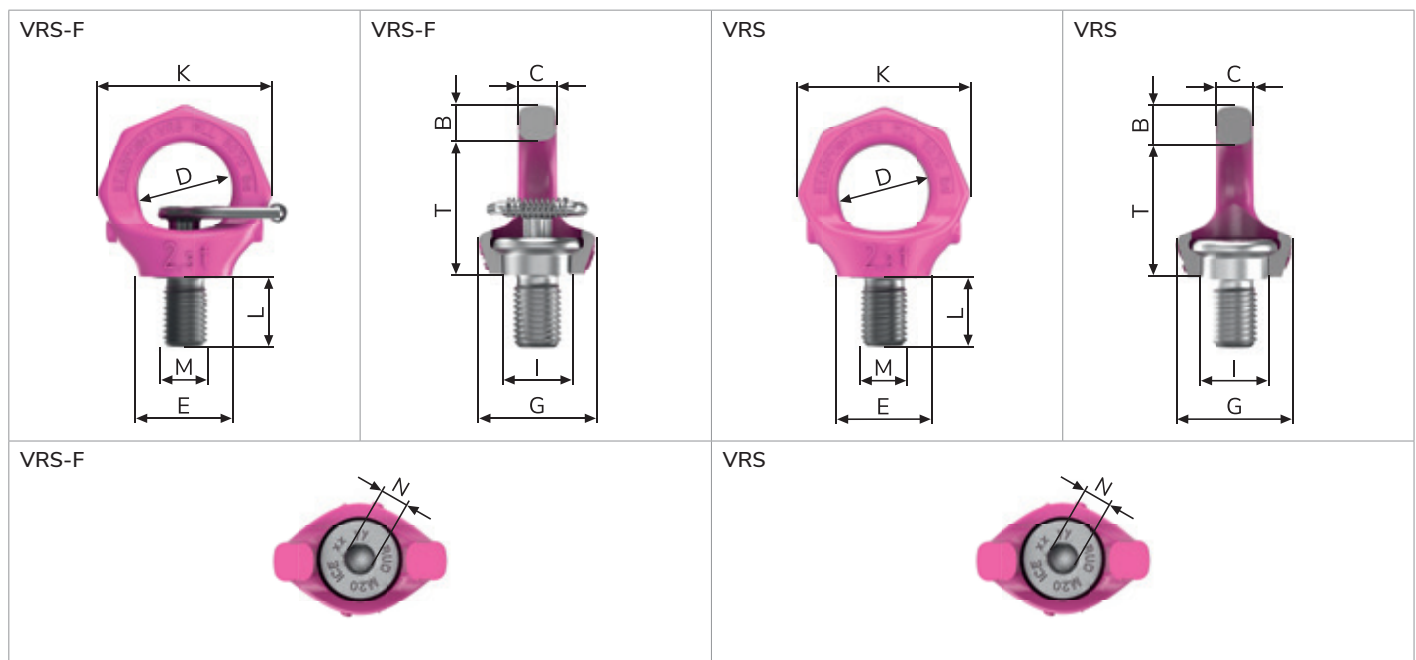

VRS-F- / VRS-G-STARPOINT

Metric with variable length / pipe thread.

VRS-F-STARPOINT – METRIC WITH VARIABLE LENGTH – DESIGN FACTOR 4:1.

Type	WLL [t]	Weight (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L vario [mm]	M	N [mm]	Tightening torque [Nm]	Order no. VRS-F
VRS-F-M10	0.4	¹	35	11	9	25	25	30	16.3	47	16-70	M10	6	10	8600270
VRS-F-M12	0.75	¹	42	13	10	30	30	34	19.8	56	19-150	M12	8	25	8600271
VRS-F-M16	1.5	¹	49	15	13	35	36	40	23.5	65	25-120	M16	10	60	8600272
VRS-F-M20	2.3	¹	58	17	16	40	41	50	29.3	76	31-160	M20	12	115	8600273
VRS-F-M24	3.2	¹	70	20	19	49	51	60	35	92	37-140	M24	14	190	8600274
VRS-F-M30	4.5	¹	87	26	24	60	66	75	44	114	46-190	M30	17	330	8600275

¹ Weight depends on the design.


Subject to technical changes!

VRS-G-STARPOINT – PIPE THREAD ISO 228-1 – DESIGN FACTOR 5:1.

Type	WLL [lbs]	Weight (lbs/unit)	T [inch]	B [inch]	C [inch]	D [inch]	E [inch]	G [inch]	I [inch]	K [inch]	L [inch]	M	N [inch]	Tightening torque [ft-lbs]	Order no. VRS-G
VRS-G 1/4"²	1,320	0.44	1.65	0.51	0.39	1.18	1.18	-	0.78	2.20	0.71	G 1/4"	0.31	18	7999269
VRS-G 1/2"	1,320	0.66	2.05	0.51	0.39	1.18	1.38	1.18	-	2.20	0.79	G 1/2"	0.31	18	7998682
VRS-G 3/4"	2,640	1.17	2.40	0.59	0.51	1.38	1.65	1.42	-	2.56	0.91	G 3/4"	0.39	44	7998880
VRS-G 1"	2,640	1.32	2.40	0.59	0.51	1.38	1.85	1.61	-	2.56	1.26	G 1"	0.39	44	7999163
VRS-G 1 1/4"	2,640	2.20	2.52	0.59	0.51	1.38	2.28	1.97	-	2.56	1.57	G 1 1/4"	0.39	44	7903732
VRS-G 2"	2,640	3.30	2.52	0.59	0.51	1.38	3.19	2.76	-	2.56	1.77	G 2"	0.39	74	7999164
VRS-G 2"	4,050	4.18	2.87	0.67	0.63	1.57	3.19	2.76	-	2.99	1.77	G 2"	0.47	85	7900433

² Identical to VRS metric.

Subject to technical changes!

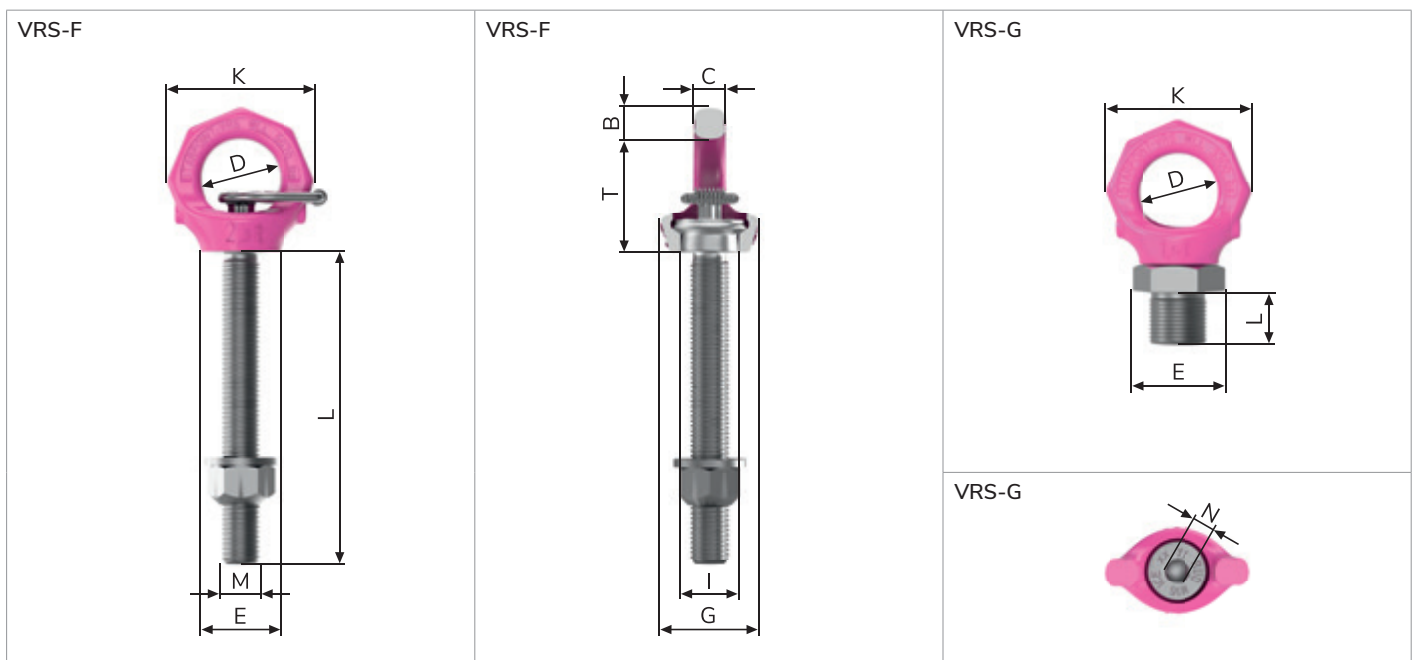


VRS-F- / VRS-STARPOINT

UNC inch thread with and without key.

VRS-F- / VRS-STARPOINT – UNC INCH THREAD WITH (VRS-F) AND WITHOUT (VRS) KEY – DESIGN FACTOR 5:1.

Type	WLL [lbs]	Weight VRS-F (lbs/unit)	Weight VRS (lbs/unit)	T [inch]	B [inch]	C [inch]	D [inch]	E [inch]	G [inch]	I [inch]	K [inch]	L [inch]	M	N	Tightening torque [ft-lbs]	Order no. VRS-F	Order no. VRS
VRS-1/4"-20UNC	170	-	0.53	1.10	0.35	0.28	0.79	0.91	1.10	0.51	1.46	0.35	1/4"-20UNC	1/4"	5	-	7999105
VRS-F 5/16"-18UNC	520	0.29	-	1.38	0.43	0.35	0.98	0.98	1.18	0.64	1.85	0.47	5/16"-18UNC	1/4"	10	7999106	-
VRS-F / VRS-3/8"-16UNC	700	0.26	0.24	1.38	0.43	0.35	0.98	0.98	1.18	0.64	1.85	0.59	3/8"-16UNC	1/4"	10	7104480	7103959
VRS-F- / VRS-7/16"-14UNC	700	0.29	0.26	1.38	0.43	0.35	0.98	0.98	1.18	0.64	1.85	0.59	7/16"-14UNC	1/4"	10	7904195	7903118
VRS-F- / VRS-1/2"-13UNC	1,320	0.46	0.42	1.65	0.51	0.39	1.18	1.18	1.34	0.78	2.20	0.71	1/2"-13UNC	5/16"	25	7104481	7103960
VRS-F- / VRS-5/8"-11UNC	2,640	0.77	0.70	1.93	0.59	0.51	1.38	1.42	1.57	0.93	2.56	0.94	5/8"-11UNC	3/8"	60	7104482	7103961
VRS-F- / VRS-3/4"-10UNC	4,050	1.28	1.19	2.28	0.67	0.63	1.57	1.61	1.97	1.15	2.99	1.18	3/4"-10UNC	1/2"	115	7104483	7103962
VRS-F- / VRS-7/8"-9UNC	4,050	1.34	1.25	2.28	0.67	0.63	1.57	1.61	1.97	1.15	2.99	1.26	7/8"-9UNC	1/2"	115	7104484	7103963
VRS-F- / VRS-1"-8UNC	5,640	2.29	2.13	2.76	0.79	0.75	1.93	2.01	2.36	1.38	3.62	1.42	1"-8UNC	9/16"	190	7104485	7103964
VRS-F- / VRS-1 1/8"-8UN	5,640	2.38	2.22	2.76	0.79	0.75	1.93	2.01	2.36	1.38	3.62	1.42	1 1/8"-8UN	9/16"	250	7903386	7999385
VRS-F- / VRS-1 1/8"-7UNC	5,640	2.38	2.22	2.76	0.79	0.75	1.93	2.01	2.36	1.38	3.62	1.42	1 1/8"-7UNC	9/16"	250	7903383	7999384
VRS-F- / VRS-1 1/4"-8UN	7,930	-	4.29	3.43	1.02	0.94	2.36	2.60	2.95	1.73	4.49	1.77	1 1/4"-8UN	5/8"	330	-	7998707
VRS-F- / VRS-1 1/4"-7UNC	7,930	4.58	4.29	3.43	1.02	0.94	2.36	2.60	2.95	1.73	4.49	1.77	1 1/4"-7UNC	3/4"	330	7104486	7103965
VRS-F- / VRS-1 1/4"-7UNC	7,930	7.92	6.38	4.09	1.26	1.14	2.87	2.99	3.86	2.09	5.31	2.13	1 1/2"-8UN	7/8"	590	-	7991917
VRS-F- / VRS-1 1/2"-6UNC	12,340	7.92	6.38	4.09	1.26	1.14	2.87	2.99	3.86	2.09	5.31	2.13	1 1/2"-6UNC	7/8"	590	7104487	7103966
VRS-F- / VRS-1 3/4"-5UNC	15,870	11	10.12	4.80	1.42	1.34	3.35	3.39	4.29	2.44	6.18	2.48	1 3/4"-5UNC	1"	925	7104488	7103967
VRS-F-2"-4.5UNC	21,160	16.72	15.4	5.43	1.65	1.50	3.78	3.98	5.04	2.76	7.05	2.83	2"-4.5UNC	1 1/8"	1,400	7104489	7103968

Subject to technical changes!

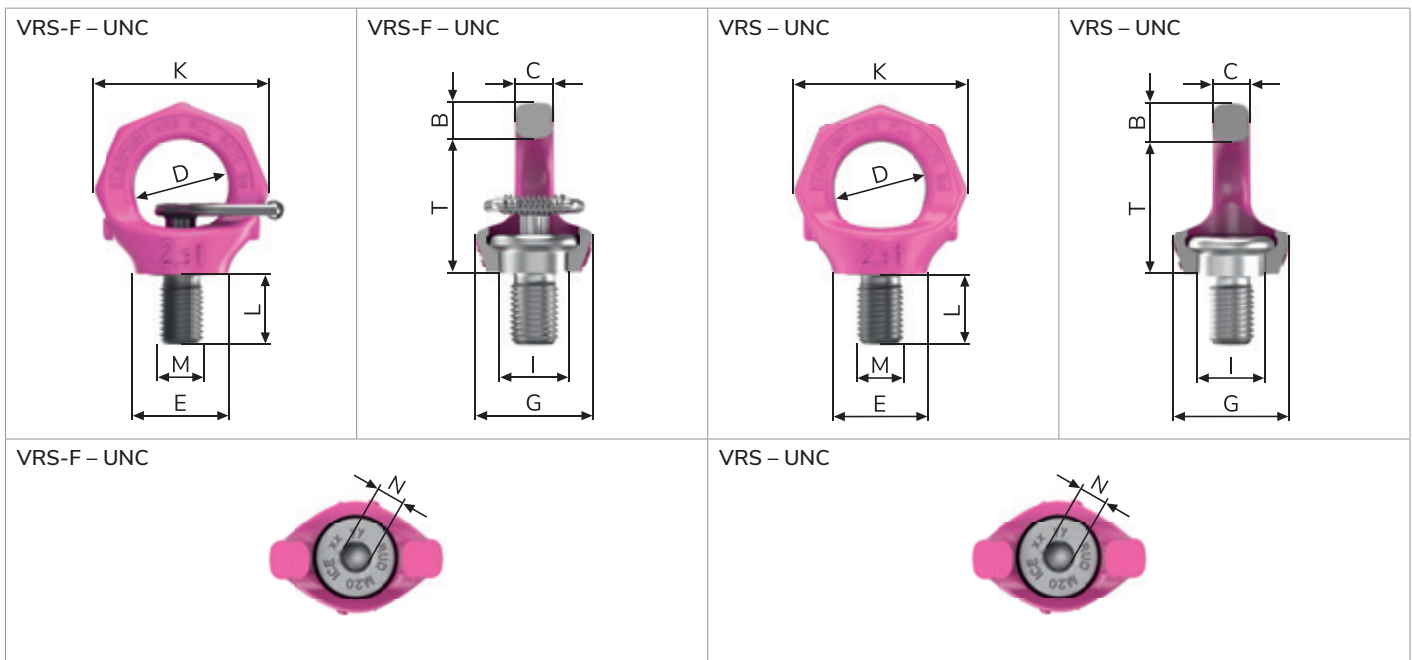

VRS-STARPOINT

Star profile key / socket key.

VRS-STAR PROFILE KEY – METRIC.

Type	Weight (kg/unit)	A [mm]	B [mm]	D [mm]	N [mm]	M	Order no.
Star profile key, width across flats 6	0.02	-	-	-	6	M6 + M8 + M10	7983986
Star profile key, width across flats 8	0.02	-	-	-	8	M12 + M14	7905453
Star profile key, width across flats 10	0.03	-	-	-	10	M16 + M18	7903254
Star profile key, width across flats 12	0.04	-	-	-	12	M20 + M22	7904282
Star profile key, width across flats 14	0.08	-	-	-	14	M24 + M27	7904283
Star profile key, width across flats 17	0.12	-	-	-	17	M30 + M33	7904284
Star profile key, width across flats 22	0.15	-	-	-	22	M36	7904285
Star profile key, width across flats 24	0.3	-	-	-	24	M42	7904286
Star profile key, width across flats 27	0.4	-	-	-	27	M48	7904287
Star profile key, width across flats 32	1.1	-	-	-	32	M56	7911045
Star profile key, width across flats 36	1.3	-	-	-	36	M64	7911046

Subject to technical changes!

VRS-STAR PROFILE KEY – UNC INCH THREAD.

Type	Weight (lbs/unit)	A [inch]	B [inch]	D [inch]	N	M	Order no.
Star profile key, width across flats 1/4"	0.04	-	-	-	1/4"	5/16"-18UNC + 3/8"-16UNC + 7/16"-14UNC	7983995
Star profile key, width across flats 5/16"	0.04	-	-	-	5/16"	1/2"-13UNC	7983996
Star profile key, width across flats 3/8"	0.07	-	-	-	3/8"	5/8"-11UNC	7983997
Star profile key, width across flats 1/2"	0.09	-	-	-	1/2"	3/4"-10UNC + 7/8"-9UNC	7983998
Star profile key, width across flats 9/16"	0.18	-	-	-	9/16"	1"-8UNC + 1 1/8"-8UN + 1 1/8"-7UNC	7983999
Star profile key, width across flats 5/8"	0.26	-	-	-	5/8"	1 1/4"-7UNC	7984000
Star profile key, width across flats 7/8"	0.33	-	-	-	7/8"	1 1/2"-6UNC	7984001
Star profile key, width across flats 1"	0.66	-	-	-	1"	1 3/4"-5UNC	7984002
Star profile key, width across flats 1 1/8"	0.88	-	-	-	1 1/8"	2"-4.5UNC	7984003

Subject to technical changes!

VRS SOCKET KEY.

Type	Weight (kg/unit)	A [mm]	B [mm]	D	N [mm]	M	Order no.
Socket key, width across flats 6	0.09	118	7.5	1/2"	6	M6 + M8 + M10	7997749
Socket key, width across flats 8	0.11	118	9	1/2"	8	M12 + M14	7997750
Socket key, width across flats 10	0.15	138	12	1/2"	10	M16 + M18	7997751
Socket key, width across flats 12	0.2	137	14	1/2"	12	M20 + M22	7997752
Socket key, width across flats 14	0.24	140	16.5	1/2"	14	M24 + M27	7997753
Socket key, width across flats 17	0.47	152	22	3/4"	17	M30 + M33	7902078
Socket key, width across flats 22	1	192	26	1"	22	M36	7902079
Socket key, width across flats 24	1.2	276	29	1"	24	M42	7902080
Socket key, width across flats 27	2	304	33	1"	27	M48	7902081
Socket key, width across flats 32	2.4	324	38	32 mm	16	M56	7908744
Socket key, width across flats 36	3.1	324	43	36 mm	20	M64	7907745

Subject to technical changes!

