




Designed, built, proof tested and shipped within 5-7 days...
*excludes Fridays or other days wherein Tandemloc is closed for any reason.



- Immediate price quotes on the phone.
- Shipped within 5-7 work days* from receipt of your order
- Capacity to 40,000 lbs.
- Up to 4 pairs of symmetrically positioned bottom lift points (spreads).
- Any spread length, 12" to 240"
- Minimum spread spacing @ 6" or 12"
- Single centered crane hook lift point
- Includes 2 removable swivel hooks
- Every lifter is proof tested to 125% of the capacity
- Durable abrasion resistant, high gloss, two part epoxy finish (safety yellow)
- Designed and manufactured to ASME B30.20 2010 standards.

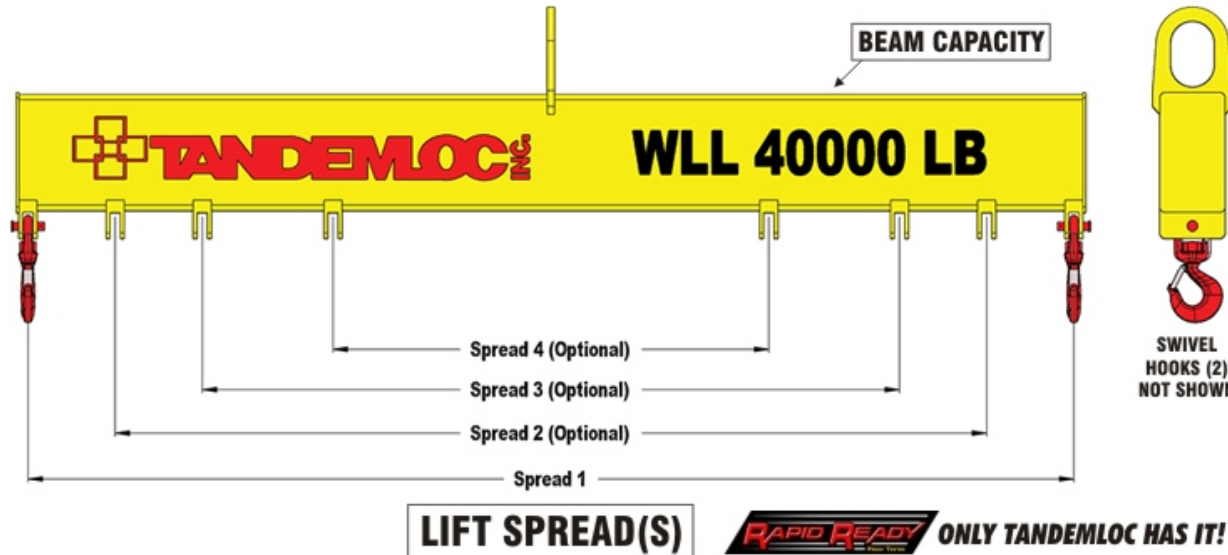

"Rapid Ready" Program
Additional Terms and Conditions

The following terms and conditions are in addition to those identified in 3006.06a:

Applicability: These additional terms only apply to those items identified as part of the Rapid Ready Program as shown on the Tandemloc website.

Shipping Schedule Obligation: Rapid Ready Products will be shipped within 5-7 "Tandemloc Work Days" after receipt of payment. The 5-7 day schedule begins on the next Tandemloc Work Day after receipt of payment and ends on the day the item is shipped, or is ready for pick up in the case of orders placed for customer pick up.

Customer Pickup: The item is considered "shipped" once the customer is notified by e-mail that the item is ready for pick-up.

Tandemloc Work Days: Are days where Tandemloc is open and producing products. This is typically Monday through Thursday, not including Tandemloc holidays. (Fridays are also not included as our Production Department is closed on Fridays). Inclement weather or other day(s) wherein Tandemloc is unexpectedly closed are not to be considered "Tandemloc Work Days".

Payment Terms: All orders for Rapid Ready products are prepaid or by credit card. This applies to all customers regardless of prior payment terms for other orders.

Cancellations>Returns/ Refunds: Are not allowed unless Tandemloc fails to meet the above shipping schedule obligation or the item is not manufactured in accordance with the sales drawing provided to the customer With the order acknowledgment.

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change.



Email: info@tandemloc.com • www.tandemloc.com
824 Highway 101 • Havelock, NC 28532
TEL: 1.800.258.7324 (252.447.7155)
FAX: 1.800.892.3273 (252.447.5502)

Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.
Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.