
## STEEL SAFETY RAILING - VDKR-7-BP-YL

APPROX WEIGHT: 37 lbs.

OOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

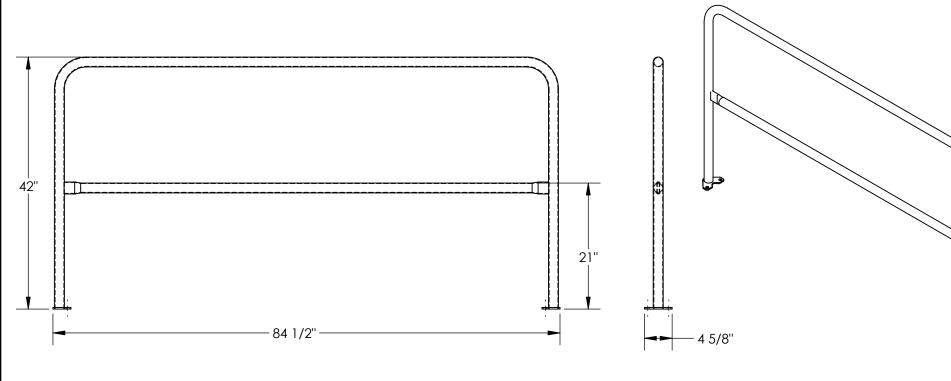

## STANDARD FEATURES

MODEL NUMBER: VDKR-7-BP-YL

TOP RAIL HEIGHT: 42" MID RAIL HEIGHT: 21"


LENGTH: 84 1/2"

**OVERALL WIDTH: 4 5/8"** 

MOUNTING HOLES: Ø9/16"

DURABLE BAKED IN POWDER

COATED YELLOW FINISH



## SPECIAL FEATURES

**NONE** 

DETAIL A SCALE 1:4

## DIMENSION TOLERANCE ± 1/4"

A P P R O V A	REPR REQUIR COMF AN <b>UNITS</b>	UNDERSIGNED, AGRI RESENTED SATISFIES D REMENTS. I ALSO AC CONFIRM PRODUCT PLIANCE WITH ALL AP ID LOCAL REGULATION REQUIRING APP MODIFIED ARE N	ESIGN AND DI KNOWLEDGE AND INSTALLA PLICABLE FED DNS AND STAN PROVAL DR ION-RETUR	MENSION MY DUTY TO ATION ERAL, STATE IDARDS. AWINGS OR NABLE
V A		[ ] As drawn	-	
L	Signed:_			_Date:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWIN

LLAD TIME WILL START OF	DIVINEULII I UI UI	IONED ALL NOVAL DIVAVIIN
DISTRIBUTOR'S NAME:		P.O.# X
VESTIL MANUFAC	W.O.# X	
DRAWN BY: TJH	DATE: 04/11/22	SALES: X
reference: X	SCALE	:: 1:16 FILE NAME:
QUOTED LEAD TIME: 🗡	QUOTE #	23-007-875