



# WH UBC Universal Beam Clamp

William Hackett Universal Beam Clamps meet and exceed the requirements of the following International Standards:  
**ASME B30.20 Chapter 6 Clamps and EN13155:2020.**

The William Hackett Universal Beam Clamp has been designed for vertical use, and side load applications, where conventional clamps are not.

The Universal Beam Clamp is suitable for pulling and lifting at angles across the beam or as a semi-permanent anchor point.


It can be **loaded at any angle** and eliminates the use of spreader beams in various lifting operations.

Fitted with an adjustable locking mechanism, ensuring secure clamping to the beam.

Built-in suspension point for low headroom design.

Lightweight design allowing for quick clamping and unclamping.

Our 10.0 tonne extra wide clamp is designed to accommodate a range of beam widths and thicknesses.

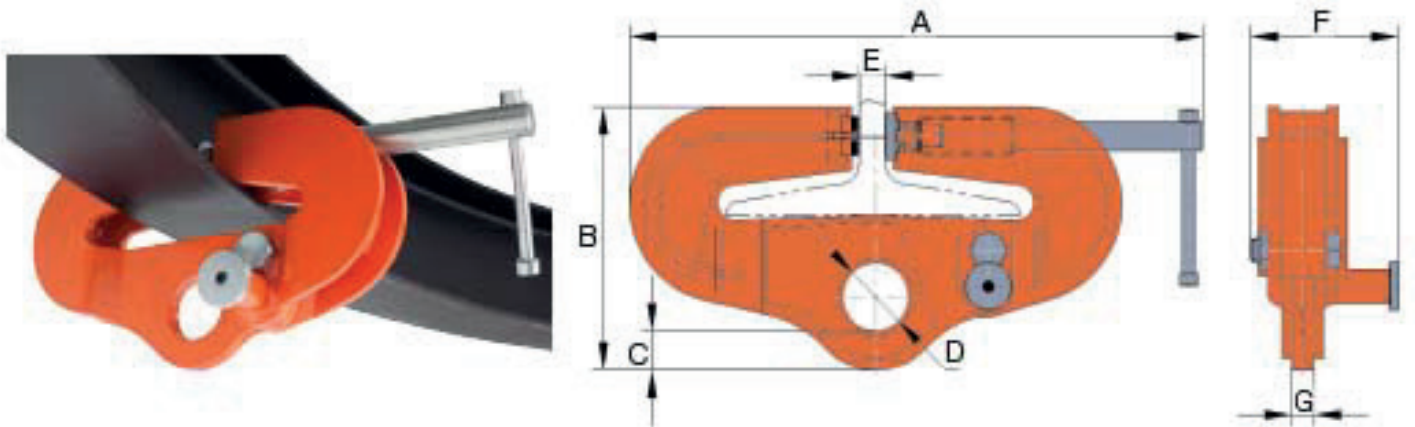

Part Code	WLL lbs	A inches	B inches	C inches	D inches	E inches	F inches	G inches	Beam Thickness inches	Beam Width inches	Mass lbs
028.200	4409	17.72	7.99	0.89	∅2.28	1.28	4.64	0.63	1.00	2.99-8.03	20.94
028.320	7054	21.65	9.25	1.10	∅2.36	1.30	5.24	0.79	1.00	4.92-8.03	32.41
028.500	11023	24.35	10.63	1.47	∅2.95	1.42	6.18	0.94	1.00	4.92-12.01	62.39
028.1000	22046	24.35	10.63	1.38	∅3.15	1.42	8.86	1.73	1.00	4.92-12.01	83.33
028.1000.E	22046	27.56	11.73	1.49	∅3.15	2.76	9.06	1.73	1.57	8.86-15.94	103.62

