
EXTRUDED ALUMINUM HOSE & CABLE CROSSOVER RAMP - XHCR-36-YB

APPROX WEIGHT: 43.39 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

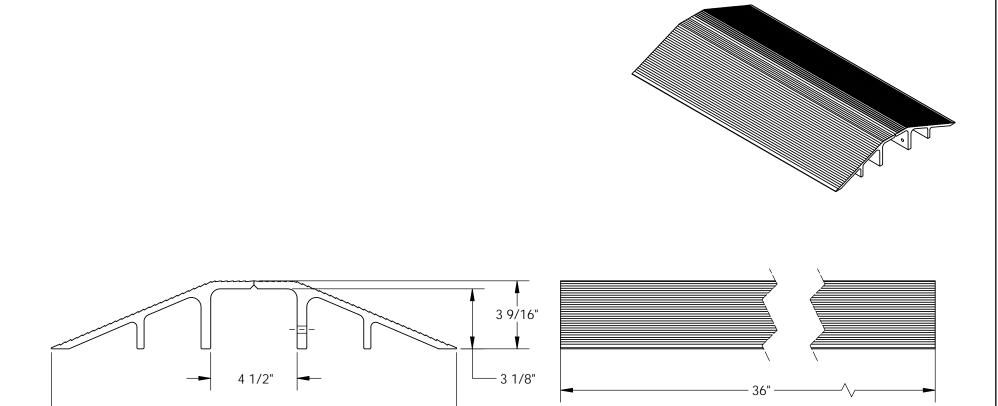

NOTE: HOLE IS FOR POWDER COATED UNITS ONLY

21 1/16"

STANDARD FEATURES

SPECIAL FEATURES

MODEL NUMBER: XHCR-36-YB

SINGLE WHEEL CAPACITY: 10,000 LBS.

OVERALL WIDTH: 21 1/16" **OVERALL LENGTH: 36"** OVERALL HEIGHT: 3 9/16" USABLE WIDTH: 4 1/2" **USABLE HEIGHT: 3 1/8"**

TWO PIECE WELDED CONSTRUCTION

FINISH: YELLOW / BLACK

NONF

FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB. POWER

Α

P

Р

R

0

٧

Α

AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn As marked Signed: Date: Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING P.O.#

DIMENSION TOLERANCE ± 1/4" I. THE UNDERSIGNED. AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

DISTRIBUTOR'S NAMF: W.O.# X VESTIL MANUFACTURING SALES: X **K.YEAKLE** 05/10/12 REFERENCE: FILE NAME: SCALE: 1:5 QUOTED LEAD TIME: X QUOTE # 29-007-168-004 Χ