
EXTRUDED ALUMINUM HOSE & CABLE CROSSOVER RAMP - XHCR-48 -YB

APPROX WEIGHT: 57.86 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

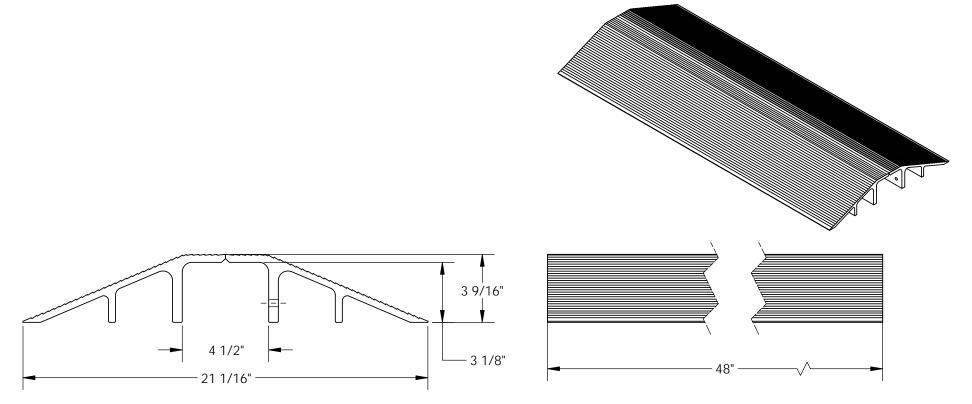

Α

P

P R

0

٧

Signed:

NOTE: HOLE IS FOR POWDER COATED UNITS ONLY

STANDARD FEATURES

SPECIAL FEATURES

MODEL NUMBER: XHCR-48-YB

SINGLE WHEEL CAPACITY: 10,000 LBS.

OVERALL WIDTH: 21 1/16" **OVERALL LENGTH: 48"** OVERALL HEIGHT: 3 9/16" USABLE WIDTH: 4 1/2" **USABLE HEIGHT: 3 1/8"**

TWO PIECE WELDED CONSTRUCTION

FINISH: YELLOW / BLACK

NONE

		Printed Name: LEAD TIME WILL START UPO	ON RECEIP	PT OF SIGNED A	APPROVAL DRAWING
FOR INTERNAL USE ONLY PROJECT SIGN OFF		DISTRIBUTOR'S NAME:			P.O.# X
		VESTIL MANUFACTURING			W.O.# X
SALES		DRAWN BY: K.YEAKLE	DATE:		SALES: V
ENG.			05/	′10/12	X
FAB.		reference: χ		SCALE: 1:5	FILE NAME:
POWER		QUOTED LEAD TIME: X	QUOTE # X		29-007-169-004

[] As drawn

DIMENSION TOLERANCE ± 1/4" I. THE UNDERSIGNED. AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As marked

Date: