


DESCRIPTION

KStrong 5,000-lbf / 22kN Super Slider Beam Anchor.

A removable and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker. Available as a 12"-30" adjustable anchor compatible with a flange thickness between .25" and 1.25".



ACCEPTABLE INSTALLATION ORIENTATIONS

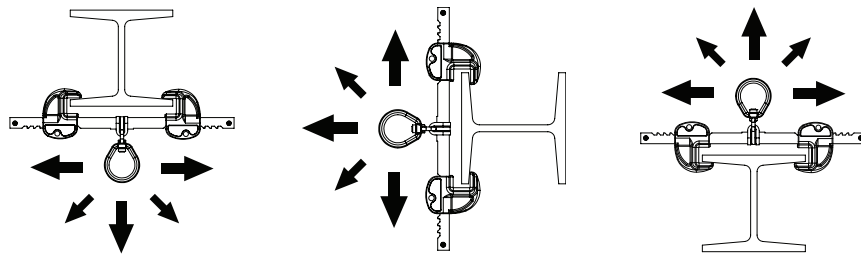

SPECIFICATIONS

- ▼ **UTS**
5,000-lbf / 22kN
- ▼ **Max User Weight**
310-lbs / 140kg
- ▼ **Working Load**
1000-lbs / 454kg

MATERIALS

- ▼ **Paw**
Aluminum
- ▼ **Support Bar**
Aluminum
- ▼ **Swivel**
Zinc Plated Steel
- ▼ **Swivel Mount**
Stainless Steel
- ▼ **Paw Inserts**
Bronze

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
UFAB1230	I & H Beams	Red	5,000-lbf (22kN)	3501g