


Master Link for single and double leg chain slings BSEN 1677-4

Hackett Master Links are manufactured from alloy steel in accordance with EN1677-4. All Master Links are individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit, reductions apply up to 400°C.

- Alloy Steel
- Proof tested to 2.5 x WLL
- Magnaflux crack detected
- Fatigue rated 20,000 cycles

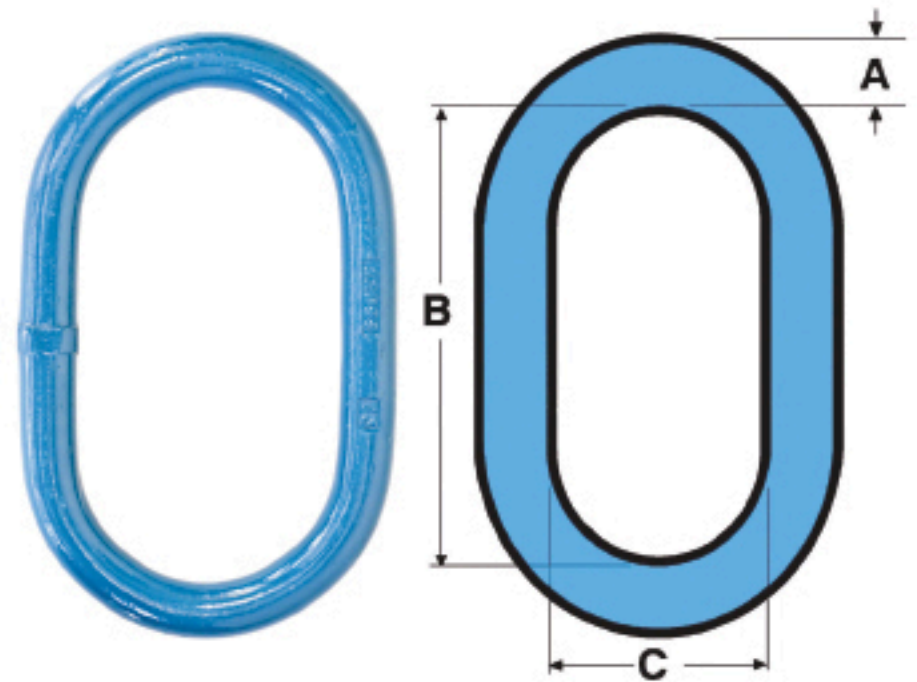

Part Code	Description	Chain Size mm Single	Chain Size mm Double	A mm	B mm	C mm	WLL tonnes	Mass Kg
X-003-0806	MA0806ML	6, 7 & 8	6	13	125	60	2.8	0.4
X-003-1008	MA1008ML	10	7 & 8	16	140	70	4.2	0.6
X-003-1310	MA1310ML	13	10	20	160	90	6.7	1.2
X-003-1613	MA1613ML	16	13	25.5	200	110	11.8	2.4
X-003-2016	MA2016ML	20	16	32	270	140	17.0	5.0
330.360*	HA36ML	22	20	36	270	140	23.0	6.5
330.400*	HA40ML	26	22	40	280	155	28.1	8.5
330.450*	HA45ML	32	26	45	320	175	38.3	12.2
330.500*	HA50ML	36	32	50	350	195	45.0	16.6

Oversize Master Links

330.220*	HA22ML	-	10	22	270	140	5.8	2.3
330.280*	HA28ML	16	13	28	270	140	14.5	3.8

*Oversize Grade 8 Master Links are painted orange