


PSA-INOX-STAR / PSA-VRS-STARPOINT

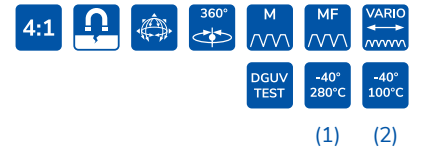

The life savers.

PRODUCT FEATURES

PSA-INOX-STAR:

- WLL range 1–2 persons.
- Ring body and bolt made from stainless steel.
- Non-removable special bolt.

PSA-VRS-STARPOINT:

- WLL range 1–2 persons.
- Non-removable special bolt.



PSA-INOX-STAR (1)

PSA-VRS-STARPOINT (2)



- ✓ In accordance with the EC Directive 89/686/EEC. Exceeds the requirements of DIN EN 795. Marking corresponds to DIN EN 365.
- ✓ Tested and certified by the PPE special division of DGVU.
- ✓ DGVU approval for fastening in steel and with blind rivet nut.

- PSA-INOX-STAR body and bolt made from stainless steel (1.4462).
- Rotatable through 360°.

PSA-INOX-STAR / PSA-VRS-STARPOINT

Metric thread.

PSA-INOX-STAR – METRIC.

Type	WLL [Persons]	Weight (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Ref. No.
PSA-INOX-STAR M12	1	0.19	43	14	12	30	30	32	18	56	18	M12	8	7997097
PSA-INOX-STAR M16	1-2	0.31	50	15	15	35	36	40	22	65	24	M16	10	7996757
PSA-INOX-STAR M20	1-2	0.56	58	19	17	40	43	47	27.5	74	30	M20	12	7900921
PSA-INOX-STAR M12 L = 50	1	0.22	43	14	12	30	30	32	18	56	50	M12	8	7997820
PSA-INOX-STAR M16 L = 50	1-2	0.4	50	15	15	35	36	40	22	65	50	M16	10	7904107
PSA-INOX-STAR M16 L = 120	1-2	0.47	50	15	15	35	36	40	22	65	120	M16	10	7909983
PSA-INOX-STAR M20 L = 60	1-2	0.6	57	19	17	40	43	47	27.5	74	60	M20	12	7901252

Subject to technical changes!

PSA-VRS-STARPOINT – METRIC.

Type	WLL [Persons]	Weight (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Ref. No.
PSA-VRS-STARPOINT M12	1	0.2	42	13	10	30	30	34	19.8	56	18	M12	8	7997100
PSA-VRS-STARPOINT M16	1-2	0.33	49	15	15	35	35	40	23.5	65	24	M16	10	7997854
PSA-VRS-STARPOINT M20	1-2	0.56	58	18	17	40	42	54	29.3	75	30	M20	12	7900920
PSA-VRS-STARPOINT M12 L = Sonderlänge	1	¹	42	13	10	30	30	34	19.8	56	19-150	M12	8	8600400
PSA-VRS-STARPOINT M16 L = Sonderlänge	1-2	¹	49	15	15	35	35	40	23.5	65	25-120	M16	10	8600401

¹ Weight depends on the design.

Subject to technical changes!

PSA-VRS-STARPOINT UNC INCH THREAD.

Type	WLL [Persons]	Weight (kg/unit)	T [mm]	B [mm]	C [mm]	D [mm]	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Ref. No.
PSA-VRS-STARPOINT 1/2"-13UNC	1	0.2	42	13	10	30	30	34	19.8	56	18	1/2" 13UNC	5/16"	7997103
PSA-VRS-STARPOINT 5/8"-11UNC	1-2	0.32	49	15	15	35	35	40	23.5	65	24	5/8"-11UNC	3/8"	7998659
PSA-VRS-STARPOINT 3/4"-10UNC	1-2	0.56	58	18	17	40	42	54	29.3	75	30	3/4"-10UNC	1/2"	7903367

Subject to technical changes!

