

### Extra Heavy-Duty Kontrol-Karrier

MADE  
IN  
USA

- Quick, sure below-hook drum handling by one person
- 2000 Lb. (907 kg) Capacity
- 360° drum tilt control in both directions
- Hand operated geared tilt with fully enclosed gear box
- Save time, reduce waste, improve productivity
- Controlled high-level pouring



Manual drum tilt is controlled with a 12' (366 cm) pull chain loop hanging 6' (183 cm) below the chain wheel. There is enough resistance in the enclosed gear box to automatically stop and hold the drum tilt angle. Hand wheel tilt control option is also available.

Extra-heavy-duty construction with steel tube framework, large shafts and bearings offer long life in tough service. A grease filled, worm gear speed reducer provides 150:1 gear reduction for fine control when tipping heavy drums.

Capacity: 2000 Lb. (907 kg) full drum  
1000 Lb. (454 kg) half-full drum

Half-full rating is an indication of capacity for tilting an unbalanced, bottom-heavy drum. A partially full drum with unbalanced and shifting load is harder to tilt than a full drum.

The drum holder of Model 185A-GR has a 9" (22.9 cm) wide metal band and two straps and ratchets to secure your 22.5" (57.2 cm) diameter steel drum.


#### Steps to use Model 185A-GR

1. Attach your hoist hook to model 185A-GR lifting point.
2. Lift and move the Kontrol-Karrier to your upright drum.
3. Move Kontrol-Karrier's drum holder to the middle of drum
4. Secure between drum ribs with two web straps... no tools are needed.
5. Lift and move drum to pouring station with your crane.
6. Pull down one side of chain loop while letting out other side to turn drum. Chain loop provides control of drum tilt 360° in either direction, even while drum is hoisted above reach.



Model #	Description	19" (48.3 cm) Adapter	Unit Wt.
185A-GR	Extra-Heavy-Duty Kontrol-Karrier, drum holder with load binders	55/30-19GR	186 Lb. (84.4 kg)

**Options and Accessories**

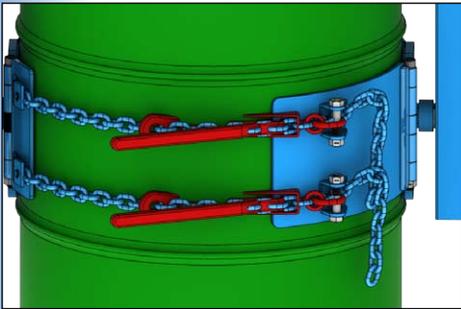

**Option # 6214i-P**  
 Factory installed Chains and Load Binders  
**Kit # 6214-P**  
 Chains and Load Binders for customer to install



**Option # X03-185GR**  
 Factory installed 10" (25.4 cm) Diameter Hand Wheel with Speed Knob. Replaces standard chain wheel to turn drum.  
**Part # 4385-P**  
 10" (25.4 cm) Hand Wheel for customer to install



**Model # 55/30-19GR**  
 Diameter Adapter for 30-gallon (114 liter) drum  
 Insert Diameter Adapter into drum holder to handle a 19" (48.3 cm) diameter steel drum.  
 Lift Diameter Adapter out to handle a 55-gallon (210 liter) steel drum.


**Fork Pocket Kit**

**Fork Pocket Kit # 6333-P**  
 Add fork pockets to below-hook drum handler.  
 Install on model 185A-GR, 185XGR  
 or on 195 Series.  
**NOT** for model with spark resistant parts.

Kit 6333-P installed on model 185A-GR

MADE  
 IN  
 USA

**Dimensions**

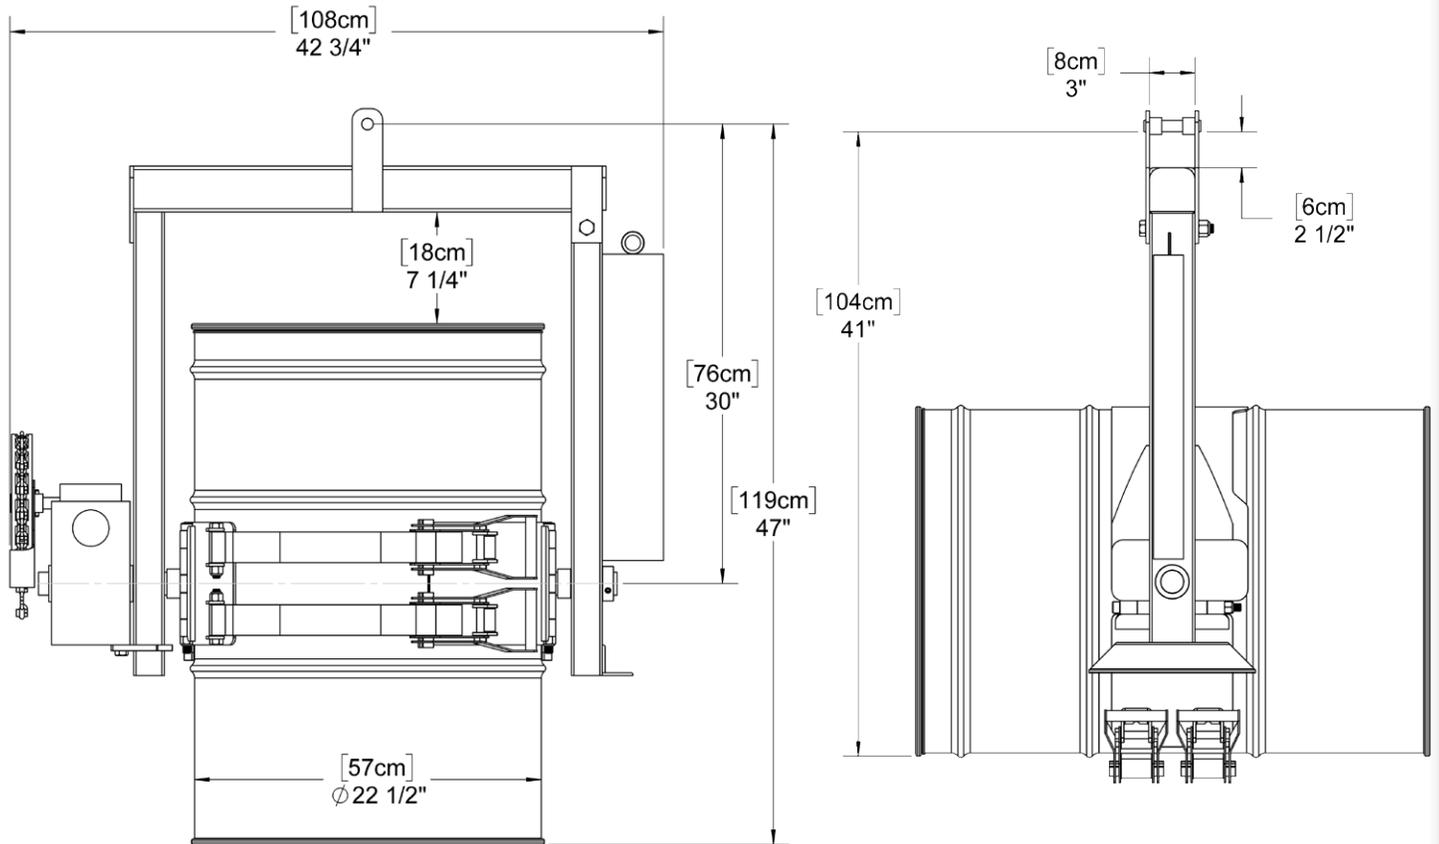

NOTE: Standard loop of pull chain extends approximately 6 feet (1.83 m) below the chain wheel.

MADE  
 IN  
 USA