
FORKLIFT SPREADER BEAM (AP09A00-00A-PA)

Cage Code: 65059 | Drawing No: SAP09A00 | Revision: A | Sheet: 1 of 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES SEE ELECTRONIC PARTS LIST FOR BILL OF MATERIALS

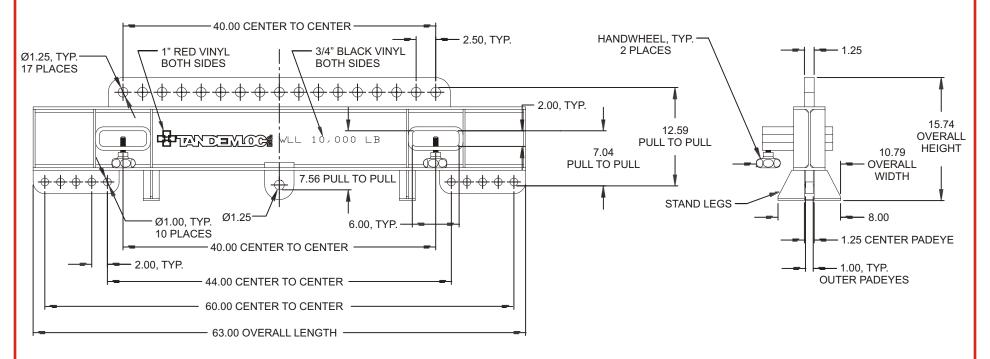

NOTES:

- 1. P/N: AP09A00-00A-1PA, FORKLIFT SPREADER BEAM
- 2. WLL: 10,000 LB. (5 TON)
- 3. PROOF TESTED TO 125% (12,500 LB) AND CERTIFIED
- 4. STANDARD SPECIFICATION #EAD21000A APPLIES
- 5. FINISH: SANDBLAST, PRIME AND PAINT SAFETY YELLOW
- 6. CALCULATED WEIGHT: 217 LB
- 7. DESIGNED AND MANUFACTURED TO MEET OR EXCEED ASME B30.20.

REVISIONS			
REV	DESCRIPTION 7.04 WAS 7.81, 12.59 WAS 13.36, 10.79 WAS 9.79, 15.74 WAS 15.61, ADDED BOTTOM STAND LEGS, WEIGHT WAS 214 LB.	DATE	APPR.
A		4/3/13	DAH

To avoid lifter failure, potential death and property damage, never exceed WLL (Working Load Limit)

This document contains the proprietary information of Tandemloc, Inc. and your access and use shall be, and is at all times, pursuant to and limited by the Tandemloc, Inc. Terms of Use.

You shall not, and shall not encourage, assist, or authorize another party to copy, distribute, publically display, modify, reverse engineer, decompile, or take any other action to reproduce or replicate this document or the information contained herein. © Copyright 2012 by Tandemloc, Inc.

Dimensions are subject to manufacturing tolerance and change



Email: info@tandemloc.com • www.tandemloc.com 824 Highway 101 • Havelock, NC 28532

TEL: 1.800.258.7324 (252.447.7155) FAX: 1.800.892.3273 (252.447.5502) Tandemloc designs, manufactures and tests lifting, securing and mobilizing components for all industries. See our website for details and important safety information.

Read all safety labels and instructions prior to use. Product to be used by qualified personnel only.