

CLB SERIES Lifting Lugs

The **CLB container lugs** are supplied in sets of four. They are available with a total capacity of 56 tons. The CLB series serve as flexible lashing points for the transportation of containers. The CLB lugs are mounted horizontally to the side of the container at either the top or bottom fixing holes. This model has a spring loaded bolt to prevent accidental release.




- Spring loaded bolt to prevent accidental release
- Mounted at the side of the container in either upper or lower holes
- Easy installation and removal, simple insert and turn installation
- Designed to eliminate the dangerous use of standard hooks
- Lugs cannot drop out when slings become slack
- Lugs can be used left hand or right hand turns
- For maximum capacity use a lifting beam in conjunction with the CLB lifting lugs




SPECIFICATIONS

Model	Working Load Limit (Per set of 4)	Dimensions							Weight
		A	B	C	D	E	F	G	
Imperial									
	lb.	in.	in.	in.	in.	in.	in.	in.	lb.
CLB32	70,500	5.984	7.126	1.772	1.457	2.874	2.953	1.575	39.7
CLB40	88,100	5.984	7.126	1.772	1.457	2.874	2.953	1.575	39.7

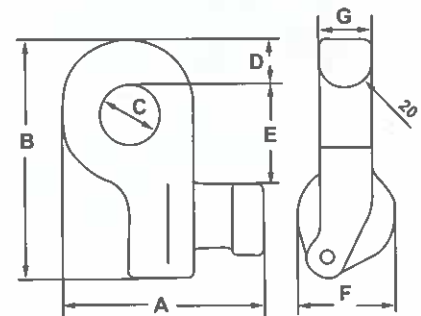

50T
Vertical

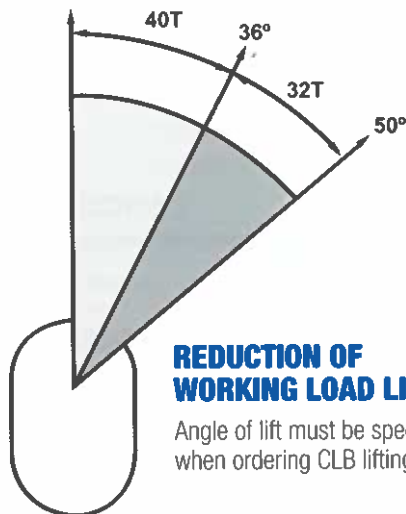

REDUCTION OF WORKING LOAD LIMIT

Angle of lift must be specified when ordering CLB lifting lugs



CLB DESIGN

Designed to eliminate the use of standard hooks as attachments.