
HYDRAULIC BOX DUMPERS - HBD-2-36

APPROX WEIGHT: 1621.91 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

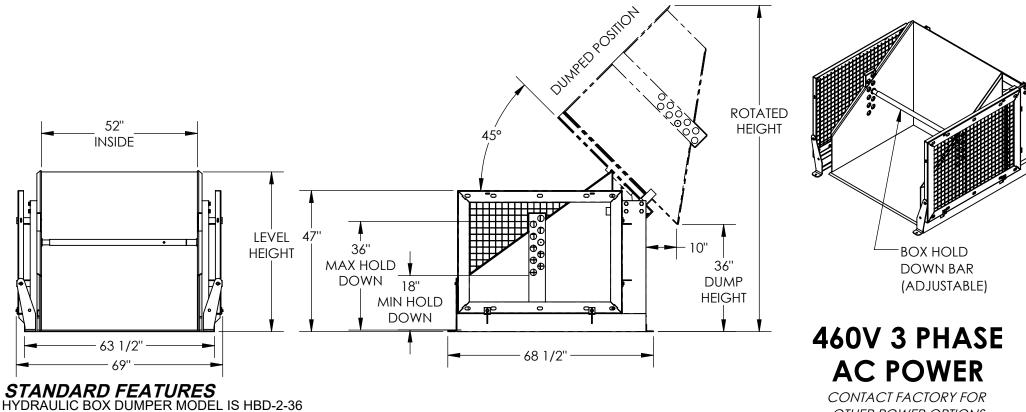

CHUTE IS 52" W X 50"L (USABLE) DUMPER CAPACITY IS 2000 LBS

DUMP HEIGHT IS 36"

HOLD DOWN WILL ACCEPT BOXES 18" TO 36" HIGH W/ HOLES EVERY 2"

FRAME WIDTH IS 69"

FRAME LENGTH IS 68 1/2"

LEVEL HEIGHT IS 53 1/2"

ROTATED HEIGHT IS 111"

DUMP ANGLE IS 45°

CHROME PLATED CYLINDER WITH EMERGENCY STOP VELOCITY FUSE

WARNING: CHECK STATE AND LOCAL CODES!!

HANDHELD PUSH BUTTON CONTROL W/8ft EXTENDED COIL CORD

FRAME & CHUTE DURABLE LIQUID PAINT BLUE FINISH

GUARDS & HOLD DOWN BAR DURABLE BAKED IN POWDER COAT YELLOW FINISH

SPECIAL FEATURES

NONE

OTHER POWER OPTIONS NOTE: SINGLE PH. PLUG-IN UNITS WILL HAVE APPROX 120 SEC DUMP / 33 SEC LOWER

		APPROVA-	REPRESE REQUIREM CO COMPLIA AND L UNITS R	ENTED SATIS ENTS. I ALS NFIRM PRO NCE WITH A OCAL REG REQUIRING ODIFIED A	FIES DESIGN AN O ACKNOWLEI DUCT AND INST ALL APPLICABLE ULATIONS AND	DGE MY DUTY TO FALLATION FEFEDERAL, STATE STANDARDS. DRAWINGS OR TURNABLE
		ᅵ	Signed:			Date:
			Printed Name	e:		
			LEAD TIME WIL	L START UPC		GNED APPROVAL DRAWING
	DISTRIBUTOR'S NAME	Ξ:				P.O.# X
	VESTIL MANUFACTURING					W.O.# X
	DRAWN BY: CA				22/2011	SALES: X
	reference: X				SCALE: 1:32	FILE NAME:
4"	QUOTED LEAD TIME:	Χ		QUOTE #		34-007-004

DIMENSION TOLERANCE ± 1/4