


HHBDSK02-01D + WPC02D

2 TON DUAL SPEED WITH MOTORIZED TROLLEY
3-PHASE 230V/460V

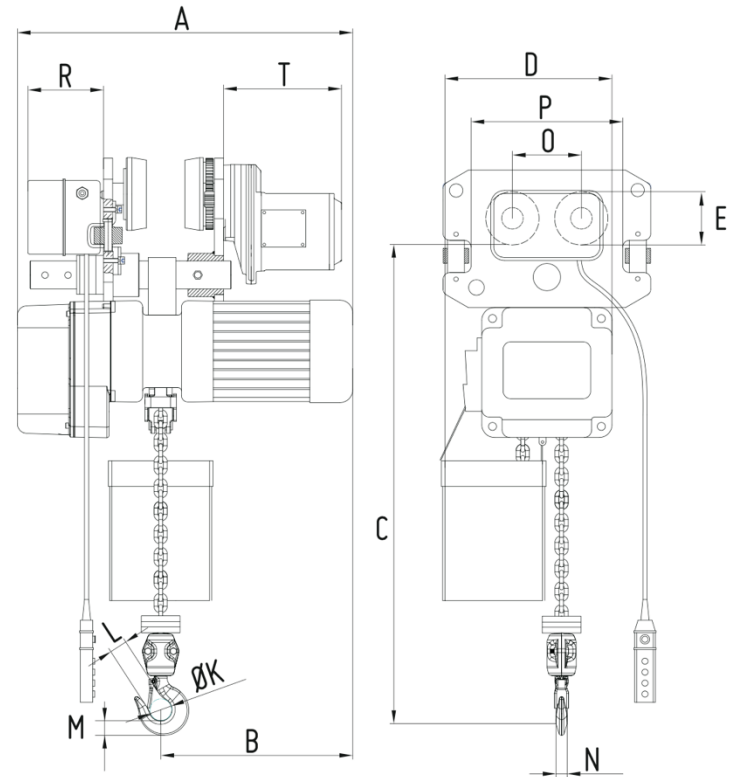

Product Code	Capacity	Headroom (C)	A	B	D	E	K	L	N	O	P	R	T
	tons	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches
HHBDSK02-01D +WPC02D	2	22	25.5	12.9	12.6	4.7	1.9	1.4	1.1	5	9.3	5.6	11

Product Code	Capacity	Standard Lift Height	Push Button Cord	Lifting Speed	Motor Output	Control Voltage	Lifting Motor Rated		Load Chain Size Ø	Chain Fall Lines	Trolley Speed	Trolley Output	Trolley Motor Rated		Trolley Minimum Curve Radius	Trolley Flange Width	Net Weight
	tons	feet	feet	ft/min	hp	Volts	Current (amps)		mm		ft/min	hp	Current (amps)		inches	inches	lbs.
							@230v	@460v					@230v	@460v			
HHBDSK02-01D +WPC02D	2	20	17	24.9 / 8.5	2	110	12.3 / 5.1	5.8 / 3	Ø 10 x 30	1	80 / 28	0.5	3.2	1.6	47.2	3.23-12	321.9