


LIFT MASTER BOOM, LIFT MASTER ONE, TELESCOPING BOOM - LM-1T-8-30

APPROX WEIGHT: 692.52 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

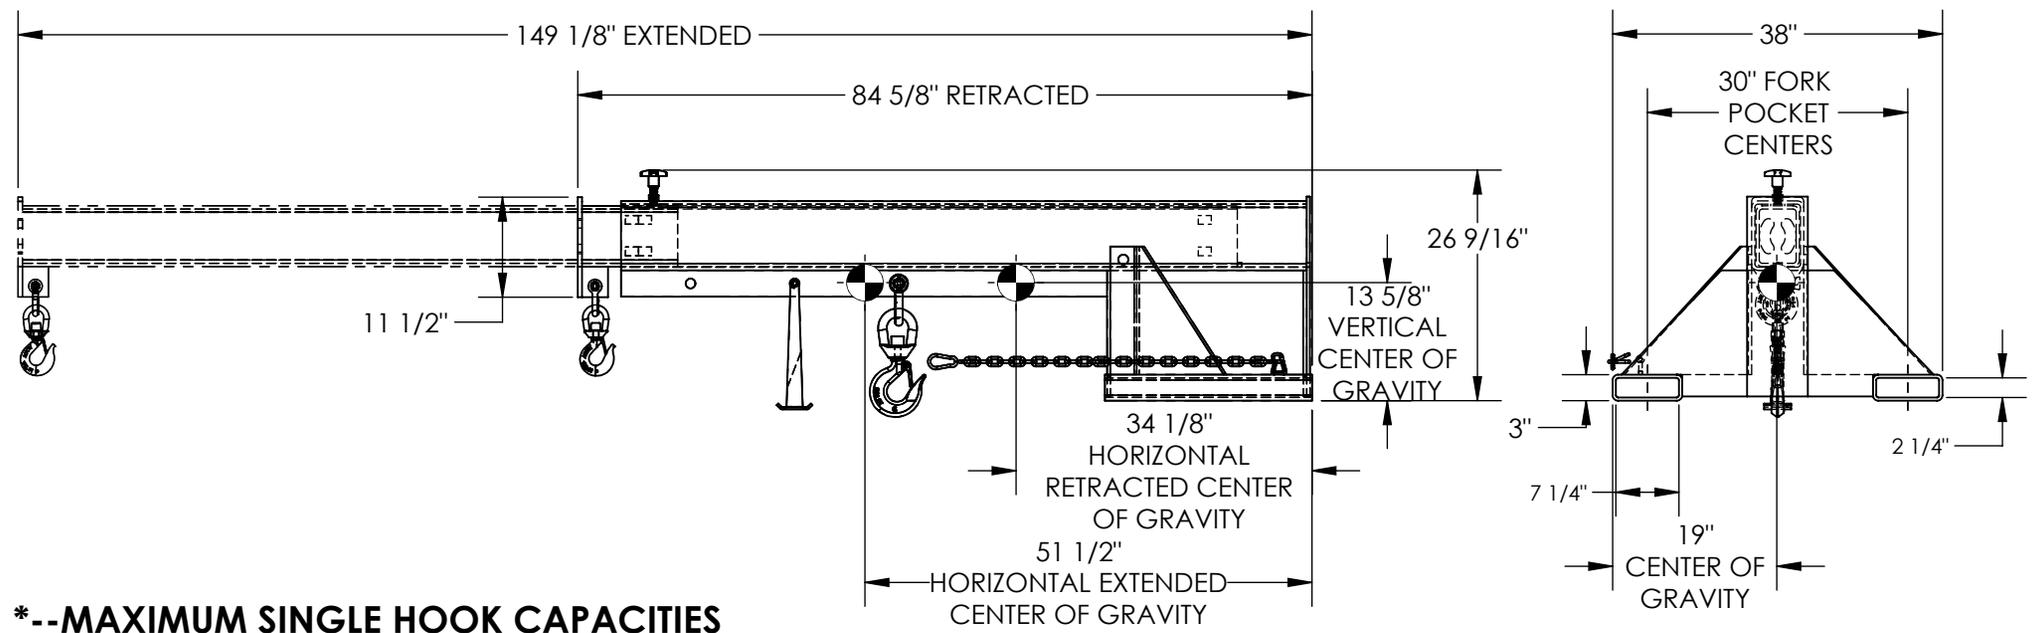

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	8000	6650	6000	5300	4650	4000	3500	3000	2600	2200

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

- MODEL NUMBER IS LM-1T-8-30
- CAPACITY IS 8,000 LBS
- OVERALL HEIGHT - 26 9/16"
- LENGTH RETRACTED - 84 5/8"
- LENGTH EXTENDED - 149 1/8"
- OVERALL WIDTH IS 38"
- 36" MINIMUM HOOK POINT
- 144" MAXIMUM HOOK POINT
- USABLE FORK POCKET - 7 1/4" x 2 1/4"
- 30" FORK POCKET CENTERS
- FRAME DURABLE LIQUID PAINT BLUE FINISH
- BOOM DURABLE LIQUID PAINT YELLOW FINISH

- APPROX. WEIGHT / LOST LOAD = 692.52
- MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
- NEVER EXCEED LOAD CENTER
- RATING PER FORKTRUCK
- MANUFACTURERS GUIDELINES.
- DO NOT USE THIS FORK TRUCK
- ATTACHMENT IF LOAD WILL EXCEED
- FORK TRUCK MANUFACTURER'S
- LOAD CENTER RATING

SPECIAL FEATURES

NONE

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	[] As drawn	[] As marked
Signed: _____		Date: _____
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
		W.O.#
DRAWN BY: B.NOTHNAGEL		DATE: 7/10/2015
REFERENCE: X		SALES: X
QUOTED LEAD TIME: X		SCALE: 1:18
QUOTE # X		FILE NAME:
		08-007-315