



HAMMER HEAD SLINGS®

Holloway Houston introduces our Hammerhead Endless Slings. They are produced using the highest strength synthetic rope, Plasma.

Plasma 12-Strand is manufactured from High Modulus PolyEthylene (HMPE) that is enhanced by Cortland's patented recrystallization process. Each sling is then covered with a braided Polyester cover utilizing our priority braiding machine. Each sling is then coated with an abrasion resistant FiberLock coating. The lower load slings are color coded based on vertical working loads. Custom colors are available. Each Sling is proof loaded with certification. Custom covering utilizing fibers such as Spectra, Technora, Kevlar, etc. is available.


Features:

- Light Weight
- Repairable
- Inspection and recertification
- Low Stretch
- Easy Handling
- High Strength

Rated Capacities in Pounds

Part No.	Vertical*	Choker	Vertical Basket**	Min length	Rope Dia.	Approx Sling Dia.	Approx wgt per linear foot of sling
HH-9-EPC	5,700	4,600	11,500	2'	3/8"	1/2"	0.123
HH-11-EPC	6,900	5,500	13,800	2'	7/16"	9/16"	0.149
HH-12-EPC	10,300	8,200	20,600	2'	1/2"	11/16"	0.216
HH-16-EPC	16,900	13,500	33,900	2'	5/8"	7/8"	0.348
HH-18-EPC	22,600	18,000	45,200	2'	3/4"	1"	0.461
HH-22-EPC	30,500	24,400	61,000	2.5'	7/8"	1-3/16"	0.66
HH-24-EPC	36,300	29,000	72,600	2.5'	1"	1-3/8"	0.819
HH-28-EPC	48,500	38,800	97,000	3'	1-1/8"	1-1/2"	1.087
HH-30-EPC	54,400	43,500	108,800	3'	1-1/4"	1-5/8"	1.278
HH-36-EPC	72,000	58,000	145,000	3.5'	1-1/2"	2"	1.842
HH-40-EPC	96,000	76,000	192,000	3.5'	1-5/8"	2-3/16"	2.269
HH-44-EPC	103,000	82,000	207,000	4'	1-3/4"	2-3/8"	2.693
HH-48-EPC	117,000	93,000	234,000	4'	2"	2-5/8"	2.28
HH-52-EPC	141,000	112,000	282,000	4.5'	2-1/8"	2-7/8"	3.295
HH-56-EPC	158,000	126,000	317,000	4.5'	2-1/4"	3"	3.849
HH-60-EPC	174,000	139,000	349,000	5'	2-1/2"	3-3/8"	4.323
HH-64-EPC	196,000	157,000	393,000	5'	2-5/8"	3-1/2"	5.303
HH-68-EPC	217,000	174,000	435,000	6'	2-3/4"	3-5/8"	5.951
HH-72-EPC	257,000	205,000	514,000	6.5'	3"	4"	6.752
HH-76-EPC	280,000	224,000	561,000	6.5'	3-1/8"	4-1/8"	7.728
HH-80-EPC	310,000	248,000	620,000	6.5'	3-1/4"	4-3/8"	9.344
HH-84-EPC	365,000	292,000	731,000	7.5'	3-1/2"	4-5/8"	10.543
HH-88-EPC	412,000	330,000	825,000	7.5'	3-5/8"	4-7/8"	11.678
HH-96-EPC	501,000	401,000	1,003,000	8.5'	4"	5-3/8"	14.299

*Your minimum D/d is 2:1. However, it is suggested to use the sling at a 3:1 D/d to increase the longevity of the sling's lifespan. Sling's working load is based on a 5:1 factor of safety.

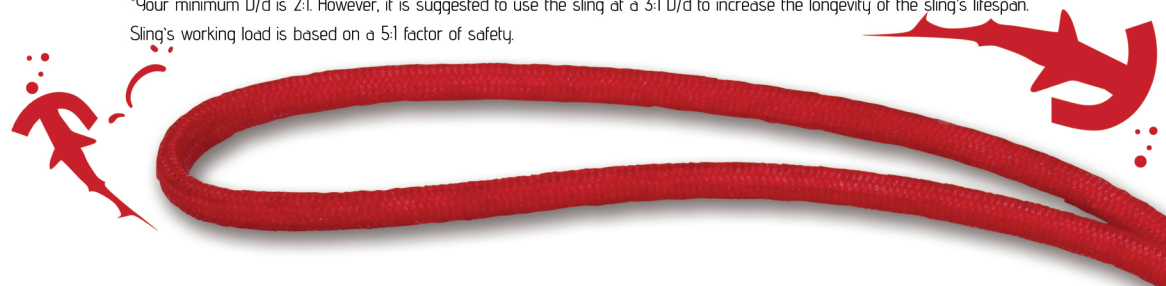

WIDE BODY SHACKLE VS HAMMERHEAD SLING D/d



HHI Part Number	Rope Diameter Inches	Vertical WLL Metric Tons	G-2160 Shackle WLL (mt)	Wide Body Width (ins.)	D/d
HH-9-EPC	0.375	2.1	7	16	4.27
HH-11-EPC	0.4375	3.4	7	16	3.66
HH-12-EPC	0.5	4.69	7	16	3.20
HH-16-EPC	0.625	7.7	12.5	213	3.41
HH-18-EPC	0.75	10.26	12.5	213	2.84
HH-22-EPC	0.875	13.86	18	25	2.86
HH-24-EPC	1	16.47	18	25	2.50
HH-28-EPC	1.125	22.01	30	313	2.78
HH-30-EPC	1.25	24.71	30	313	2.50
HH-36-EPC	1.5	33.09	40	3.75	2.50
HH-40-EPC	1.625	43.57	55	4.5	2.77
HH-44-EPC	1.75	47.01	55	4.5	2.57
HH-48-EPC	2	53.15	55	4.5	2.25
HH-52-EPC	2.125	64.08	75	4.75	2.24
HH-56-EPC	2.25	72.02	75	4.75	2.11
HH-60-EPC	2.5	79.36	125	5.91	2.36
HH-64-EPC	2.625	89.24	125	5.91	2.25
HH-72-EPC	3	116.79	125	5.91	1.97
HH-80-EPC	3.25	140.74	200	8.63	2.66
HH-88-EPC	3.625	187.16	200	8.63	2.38
HH-96-EPC	4	227.59	300	10.38	2.60